Transition Radiation Detectors: recent developments and outlooks

Paolo Spinelli

Università di Bari and
INFN Sezione di Bari

42nd INFN ELOISATRON Workshop:
innovative detectors for super colliders

Erice, 28 September-4 October, 2003

Summary

- Transition Radiation process
- Transition Radiation yield
- Signal processing
- Last generation TRDs for accelerators
- TRDs to tag high energy hadron beams
- R&D on novel TRDs
- Conclusions

Transition radiation (TR) at the interface of two different media

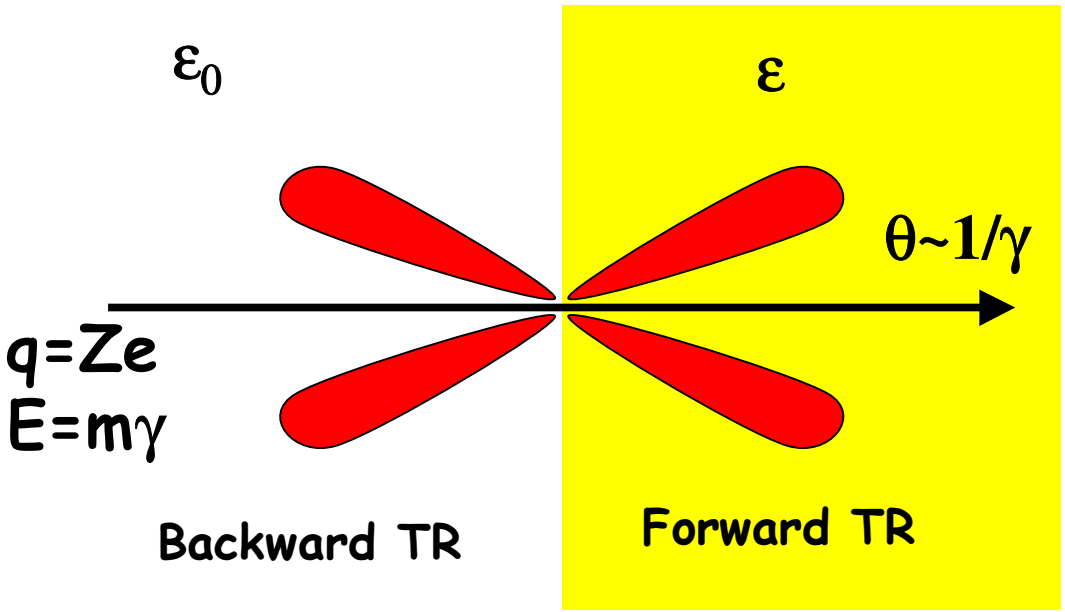

X-ray region

$\varepsilon \approx 1-(\omega_p/\omega)^2$

$\omega_p(eV) \approx 28.8(\rho(g/cm^2)Z/A)^{\frac{1}{2}}$

$\omega_p \approx 20$ eV

$\gamma \gg 1$

No Backward TR

Total TR energy $\approx 1/3\ \alpha\ Z^2\ \omega_p\ \gamma$

Number of X-rays/interface $\sim \alpha\ Z^2$

TR from a single foil

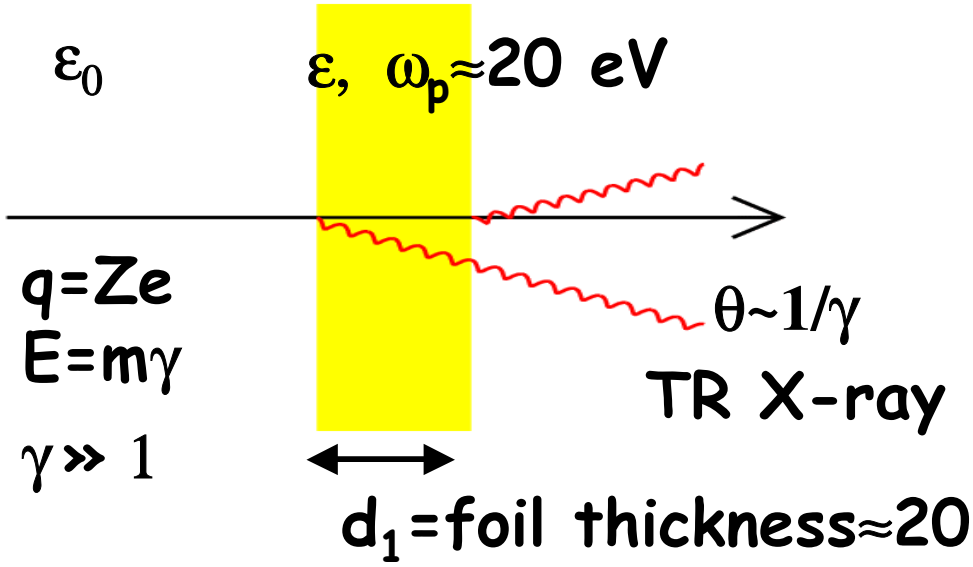

"Interference" effects:

Formation zone (z)

$d_1 \ll z \Rightarrow$ yield = 0

$\gamma < \gamma_{th} \Rightarrow$ yield = 0

$\gamma_{th} = 2.5\ d_1(\mu m)\ \omega_p(eV) \sim 1000$

$\langle E_X \rangle \approx 0.3\ \omega_p\ \gamma_{th} \sim 10$ keV

Number of X-rays $\approx \alpha\ Z^2$

Formation zone

$$Z = \frac{2}{\omega(1/\gamma^2 + (\omega_p/\omega)^2)}$$

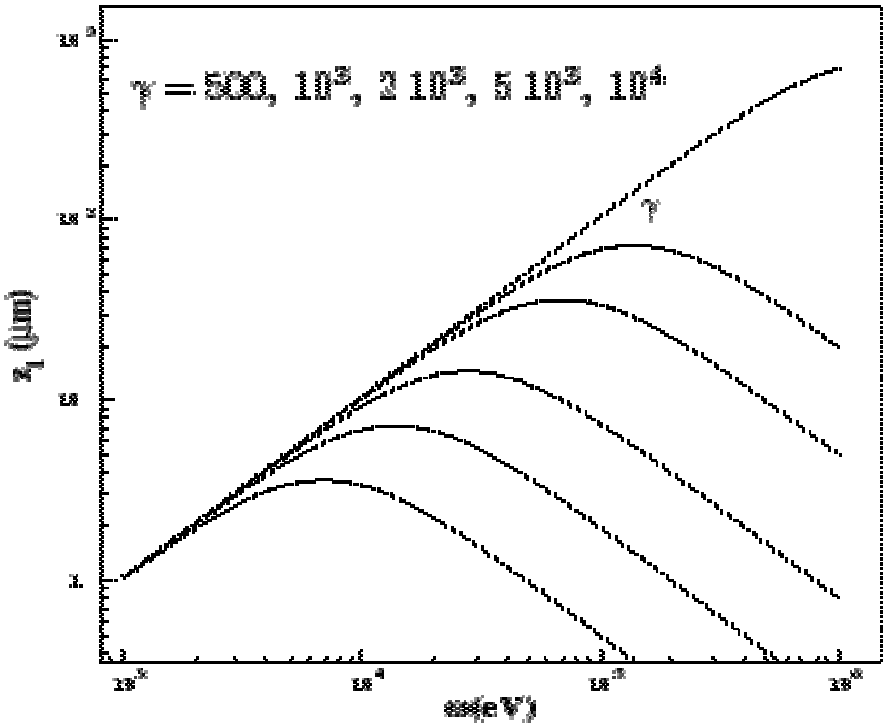

Polyethylene

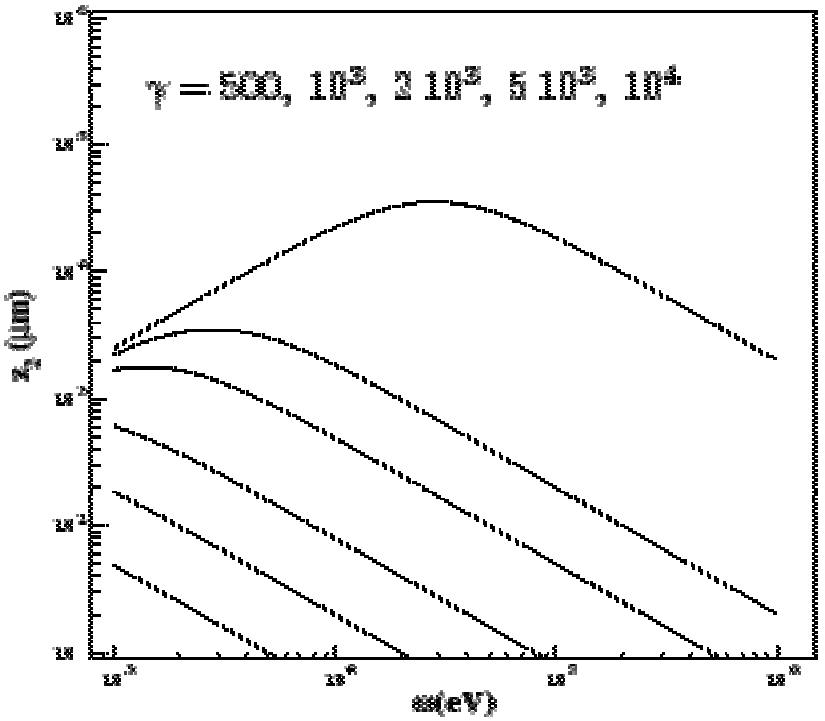

Air

TR from a "multi-foil" radiator

N_{foil} = Number of foils ~100 up to ~ 1000

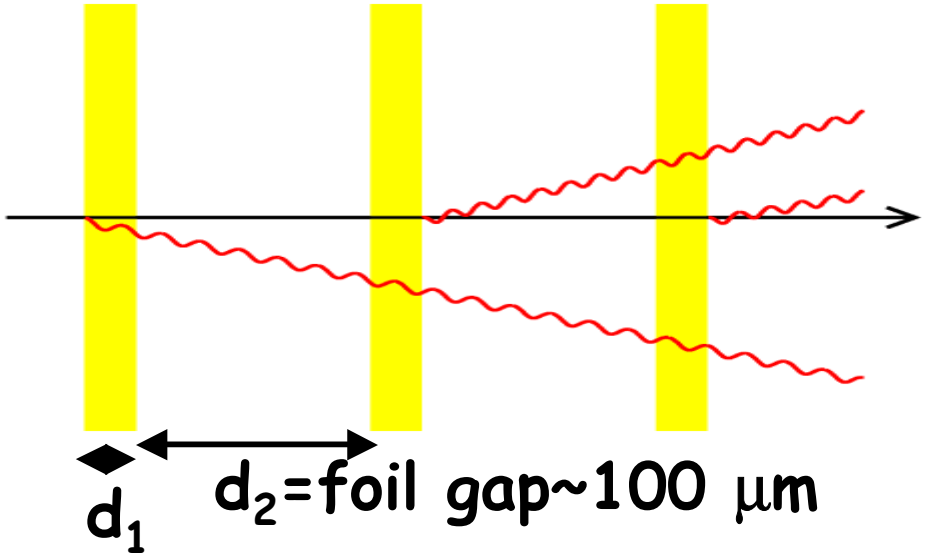

Interference effects:

gap formation zone

Saturation $\gamma > \gamma_{sat}$

$$\gamma_{sat} \sim \gamma_{th} (d_2/d_1)^{\frac{1}{2}} \sim 10^4 \text{ up to } \sim 10^5$$

$$\text{Number of X-rays} \sim \alpha Z^2 N_{foil} \sim Z^2$$

Transition Radiator Detector (TRD)

X-ray detectors: MWPCs, Drift chambers,Straw tubes (Xe-CO_2)

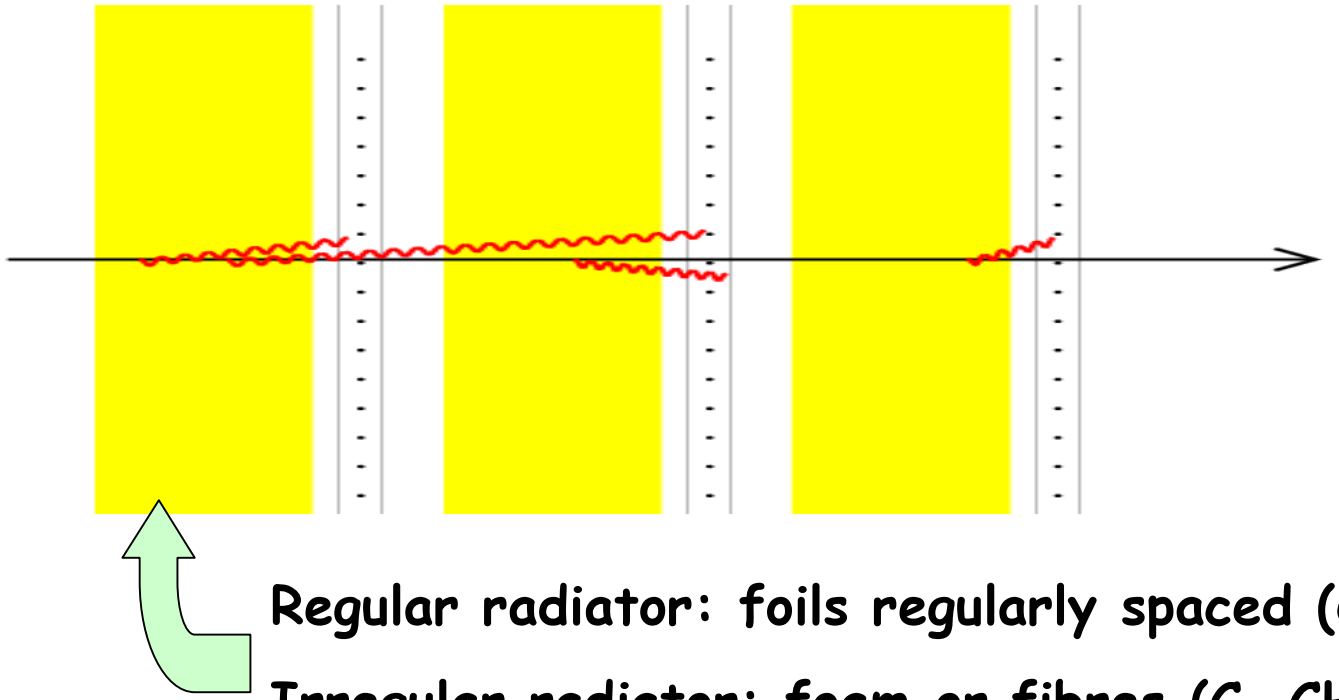

Regular radiator: foils regularly spaced (CH_2,Mylar)

Irregular radiator: foam or fibres (C, CH_2)

TR energy yield

Compton edge

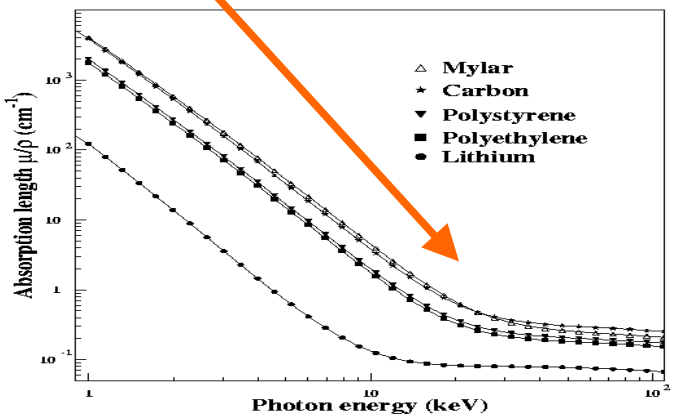

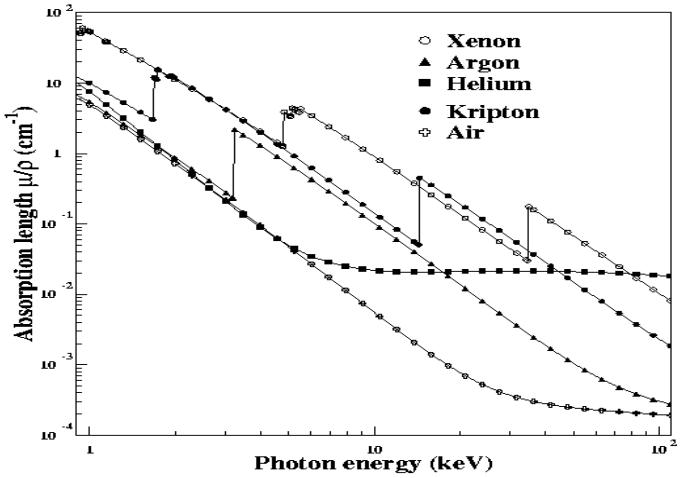

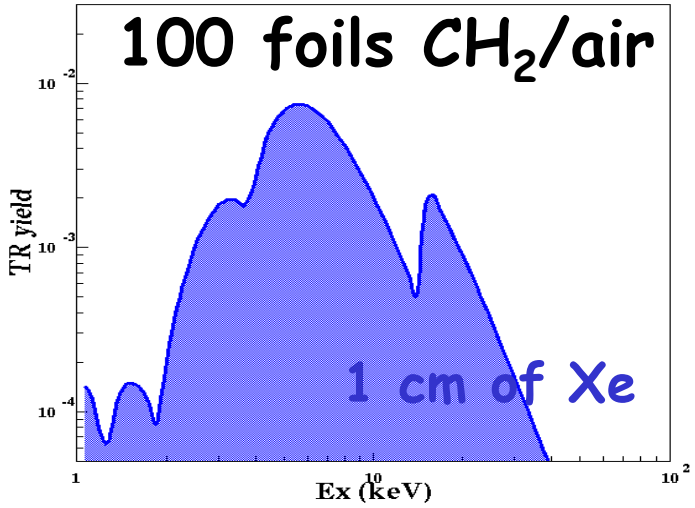

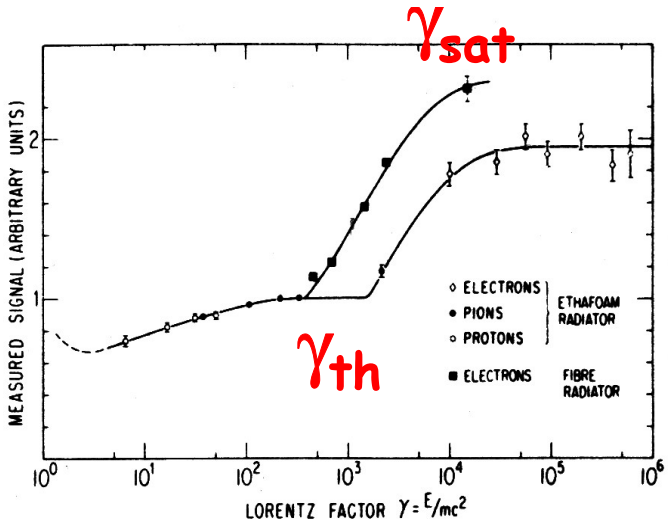

TRD Signal processing

Background: incident particle ionization loss

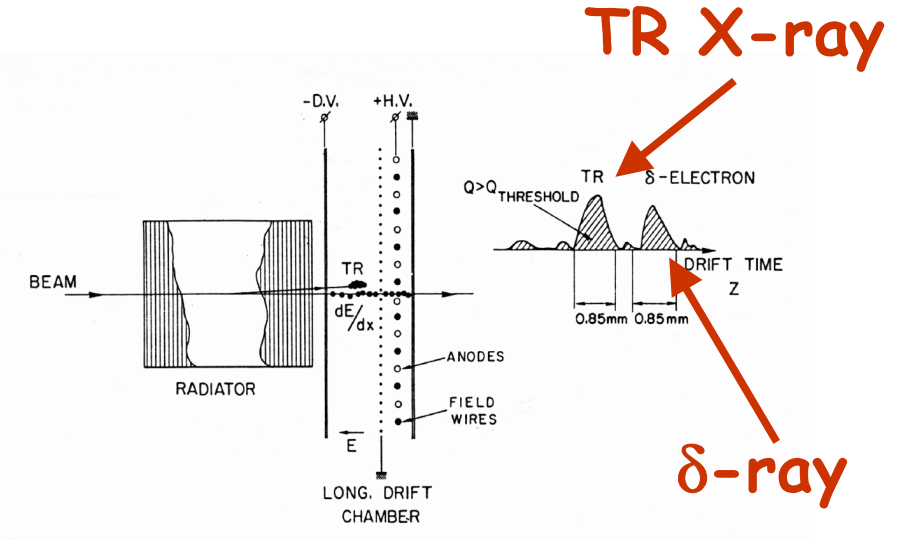

Q-method: charge analysis

N-method: cluster-counting

Electronics and detector geometry

Off-line: likelihood or truncated mean (Q) methods

Q-method vs N-method

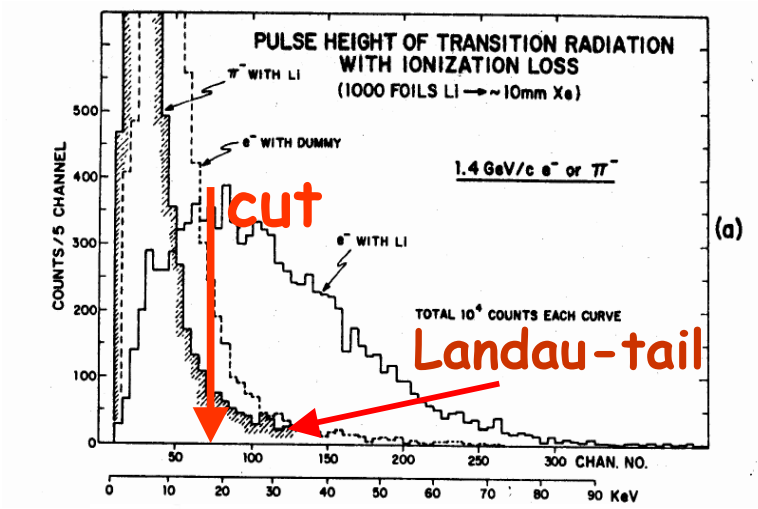

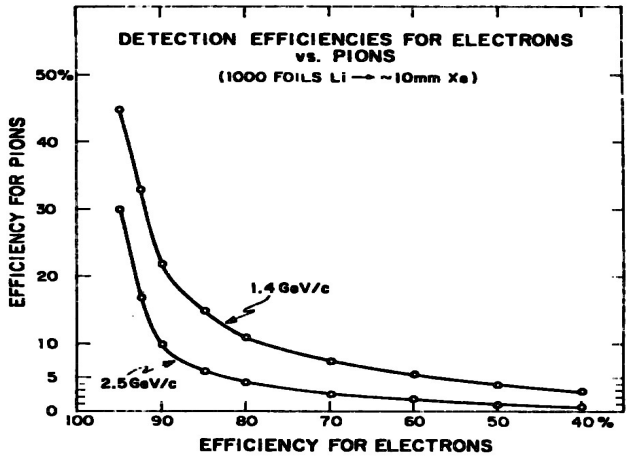

Rejection Power

$R_{\pi/e} = \varepsilon_\pi/\varepsilon_e(90\%)$

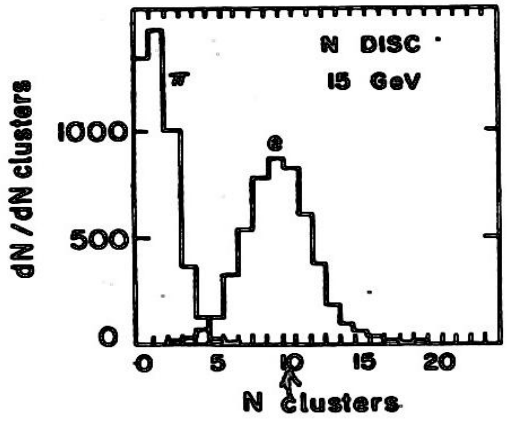

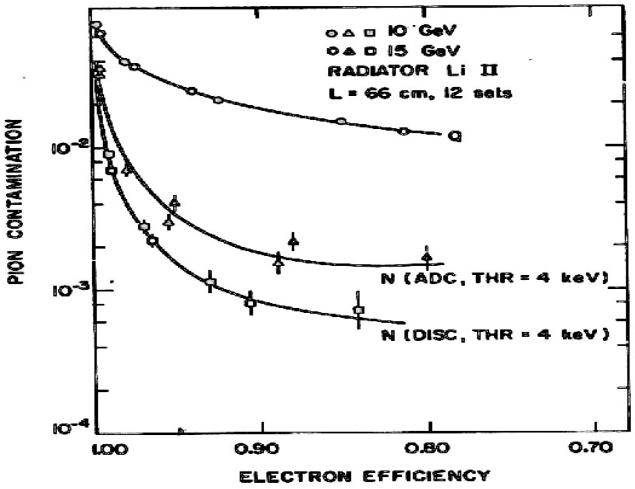

TRD performance vs length

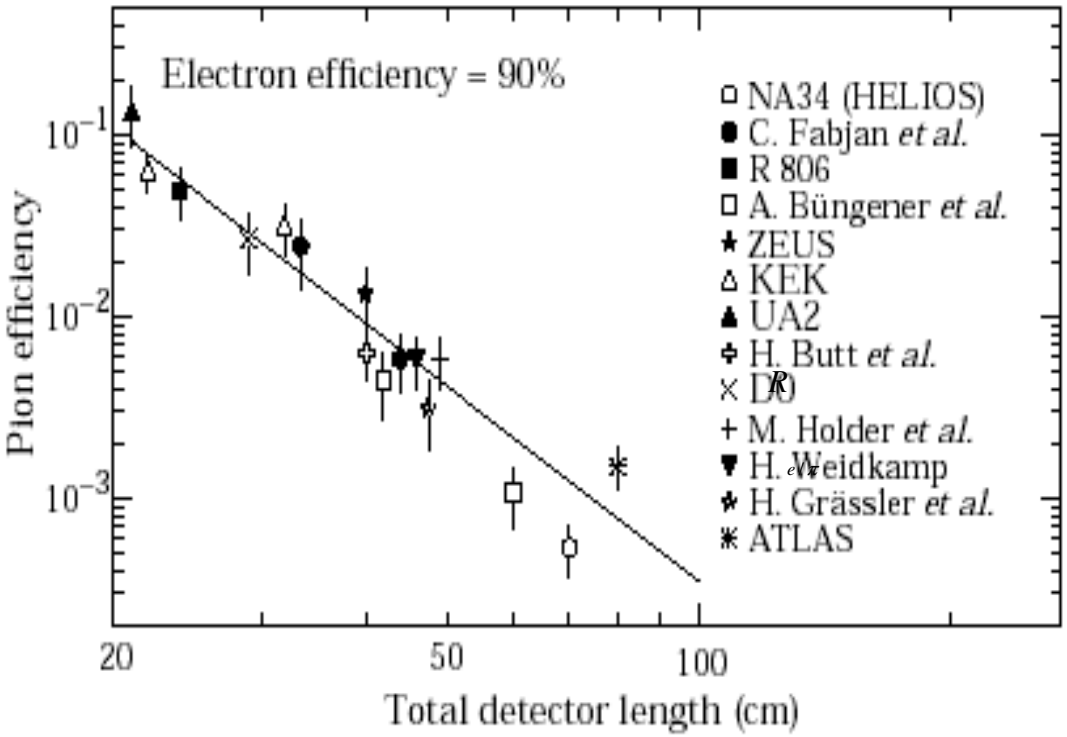

Rejection Power

$R_{\pi/e} = \varepsilon_\pi/\varepsilon_e(90\%)$

one order of magnitude in Rejection Power is gained when the TRD length is increased by ~ 20 cm

TRD applications

Particle ID: is based on the threshold properties of the TR

Energy measurement: if the mass is known, the energy can be evaluated only in the limited range between γ_{th} and γ_{sat}, and above γ_{sat} (below γ_{th}) it is possible only to set a lower (higher) limit

Charge measurement: charge identification of high energy nuclei in particle astrophysics

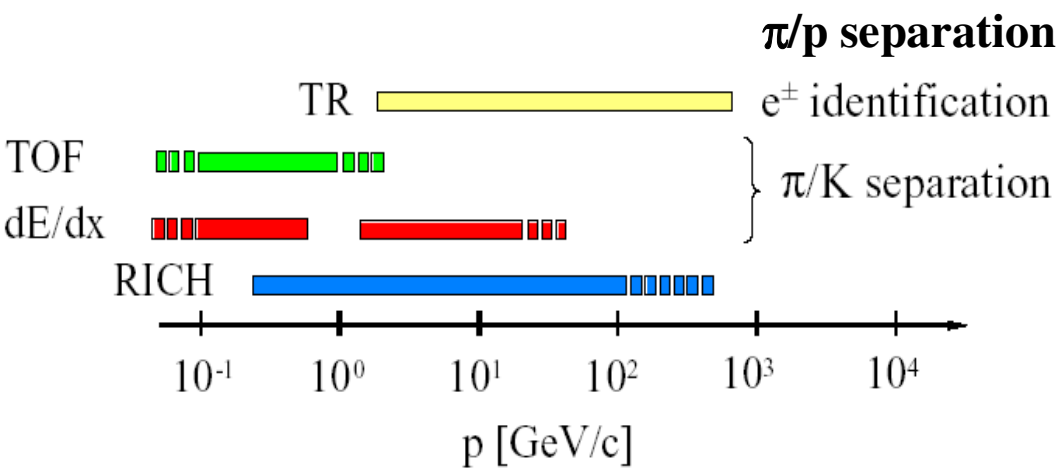

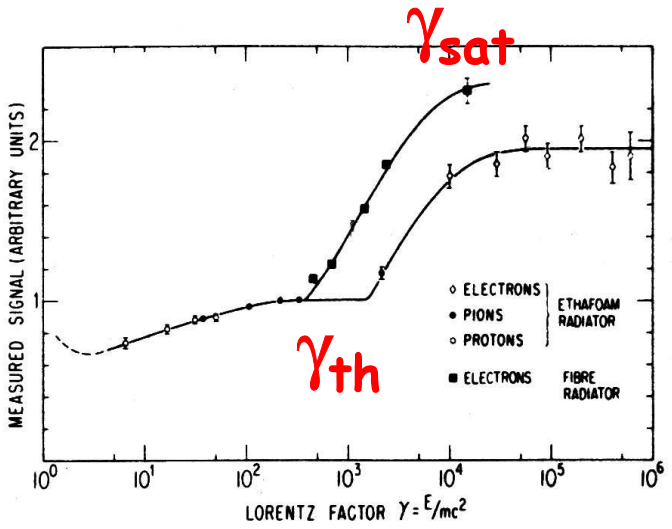

"TRDs for the 3rd millennium"

Workshop on advanced Transition Radiation Detectors for accelerator and space applications

International Advisory Committee

C. Bonifazi (ASI)
M. Calvetti (Firenze)
M.L. Cherry (Louisiana)
B. Dolgoshein (Moscow)
C. Fabjan (CERN)
D. Froidevaux (CERN)
P. Jenni (CERN)
K. Lübelsmeyer (Aachen)
P. Nevski (BNL)
E. O'Brien (BNL)
A. Romaniouk (Moscow/CERN)
A. Vacchi (Trieste)
J. Wessels (Heidelberg)

Bari, Italy, September 20-23, 2001
Hotel Riva del Sole

Organizing Committee

C. Favuzzi
G.L. Fogli
N. Giglietto
B. Marangelli
A. Rainò
P. Spinelli

Conference Secretariat

M. Brigida
P. Fusco
F. Gargano
F. Giordano
F. Loparco
M.N. Mazziotta
S. Rainò

E-mail: trd2001@ba.infn.it
Fax: +39 080 5442470
Web: http://www.ba.infn.it/~trd2001

"TRDs for the 3rd millennium"

II Workshop on advanced Transition Radiation Detectors for accelerator and space applications

International Advisory Committee

M. L. Cherry (Louisiana)
B. Dolgoshein (Moscow)
C. Fabjan (CERN)
K. Lübelsmeyer (Aachen)
D. Muller (Chicago)
P. Nevski (BNL)
E. O'Brien (BNL)
A. Romaniouk (Moscow/CERN)
F. Sauli (CERN)
A. Vacchi (Trieste)
J. Va'vra (SLAC)
J. Wessels (Münster)

Organizing Committee

C. Favuzzi
G. Fogli
P. Fusco
N. Giglietto
M. N. Mazziotta
A. Rainò
P. Spinelli

Conference Secretariat

M. Brigida
F. Gargano
F. Giordano
F. Loparco
S. Rainò

Bari, Italy, September 4-7, 2003

Hotel Riva del Sole

E-mail: trd2003@ba.infn.it
Fax: +39 080 5442470
Web: http://www.ba.infn.it/~trd2003

FONDAZIONE CASSA DI RISPARMIO DI PUGLIA F.C.R.P.

INFN Istituto Nazionale di Fisica Nucleare

Last generation TRDs for new accelerators

- ATLAS @ LHC: $\varepsilon_\pi \sim 10^{-3}$-$10^{-2}$ @ $\varepsilon_e \sim 90\%$
- ALICE @ LHC: $\varepsilon_\pi \sim 10^{-3}$ @ $\varepsilon_e \sim 90\%$
- PHENIX @ RHIC: $\varepsilon_\pi \sim 10^{-3}$ @ $\varepsilon_e \sim 90\%$

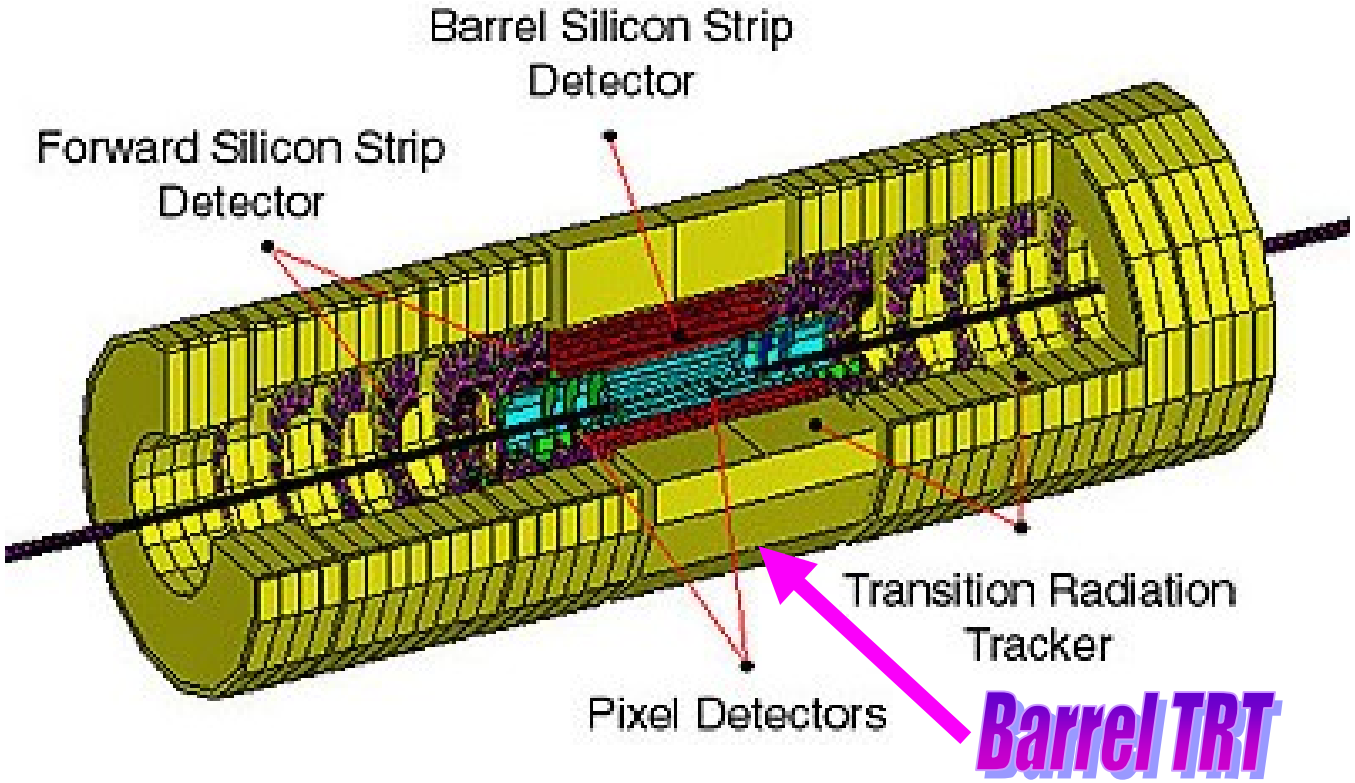

TRT Design Parameters

- **Straw based tracking chamber with TR capability for electron identification.**
- **Straws run in parallel to beam line.**
- **Active gas is $Xe/CO_2/O_2$ (70/27/3) operated at ~$2x10^4$ gas gain; drift time ~ 40ns (fast!)**
- **Counting rate ~ 6-18 MHz at LHC design luminosity 10^{34} $cm^{-2}s^{-1}$**

Chiho Wang
Duke University

TRD 2003
4-7 September 2003, Bari, Italy

Radiator prototype

TRT prototype for radiator and dE/dx studies

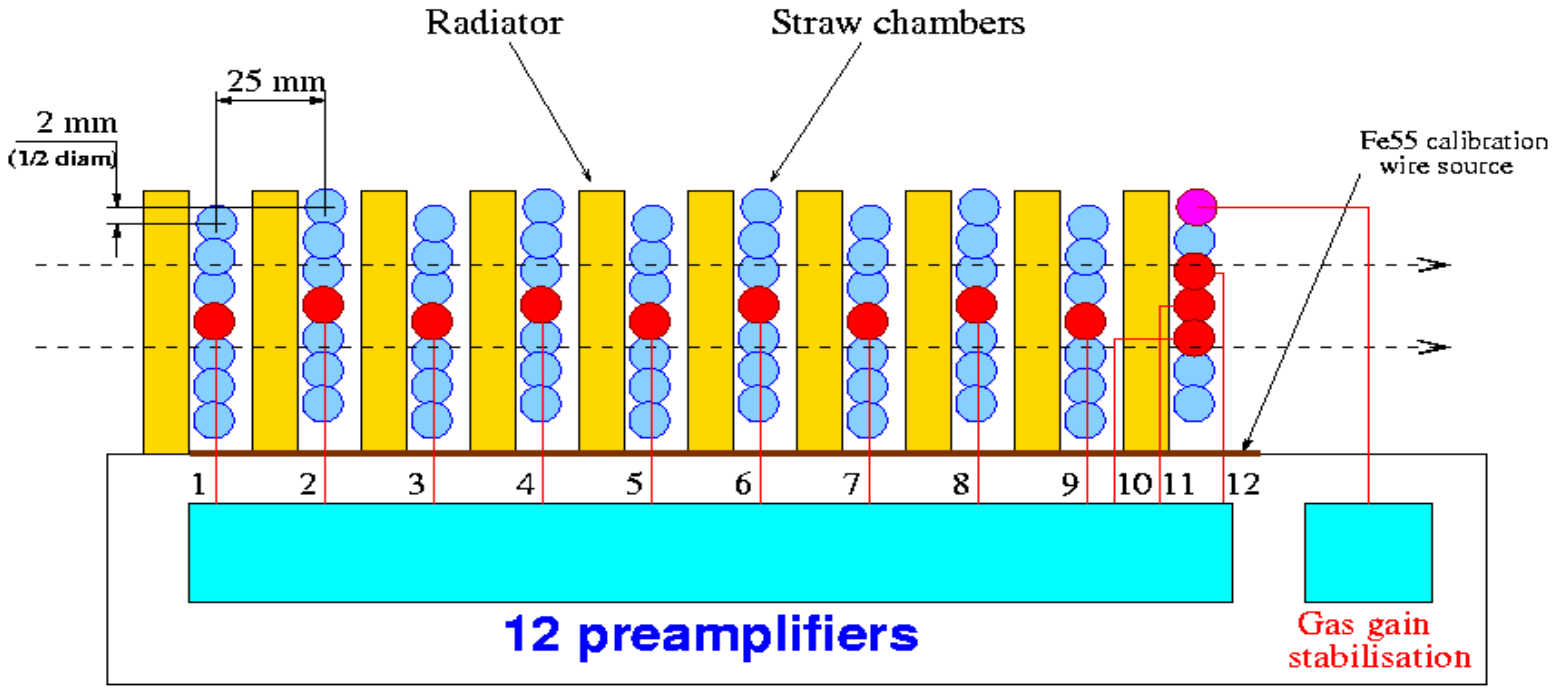

Goals: precise measurement of *dE/dx* and TR spectra; different radiators performance study; comparison with MC predictions.

(V.Tikhomirov. ATLAS TRT test beam results. 4 September 2003, Bari, Italy.)

Sector prototype

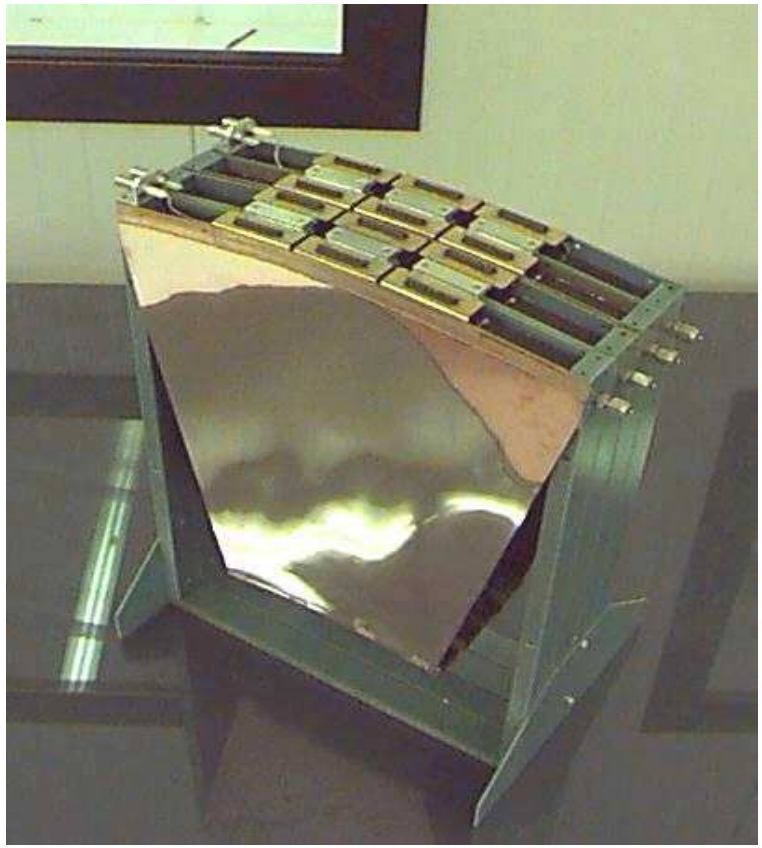

- Sector of ATLAS TRT end cap
- 384 straws, 16 layers on beam direction
- 4 mm straw diameter
- Regular radiator: 15 μm polyethylene foils with 200 μm spacing
- 70% Xe + 20% CF_4 + 10% CO_2 gas mixture (70% Xe + 27% CO_2 + 3% O_2 since 2002)
- 2.5 $\cdot 10^4$ nominal gas gain
- LHC type electronics

(V.Tikhomirov. ATLAS TRT test beam results. 4 September 2003, Bari, Italy.)

ALICE TRD @ LHC

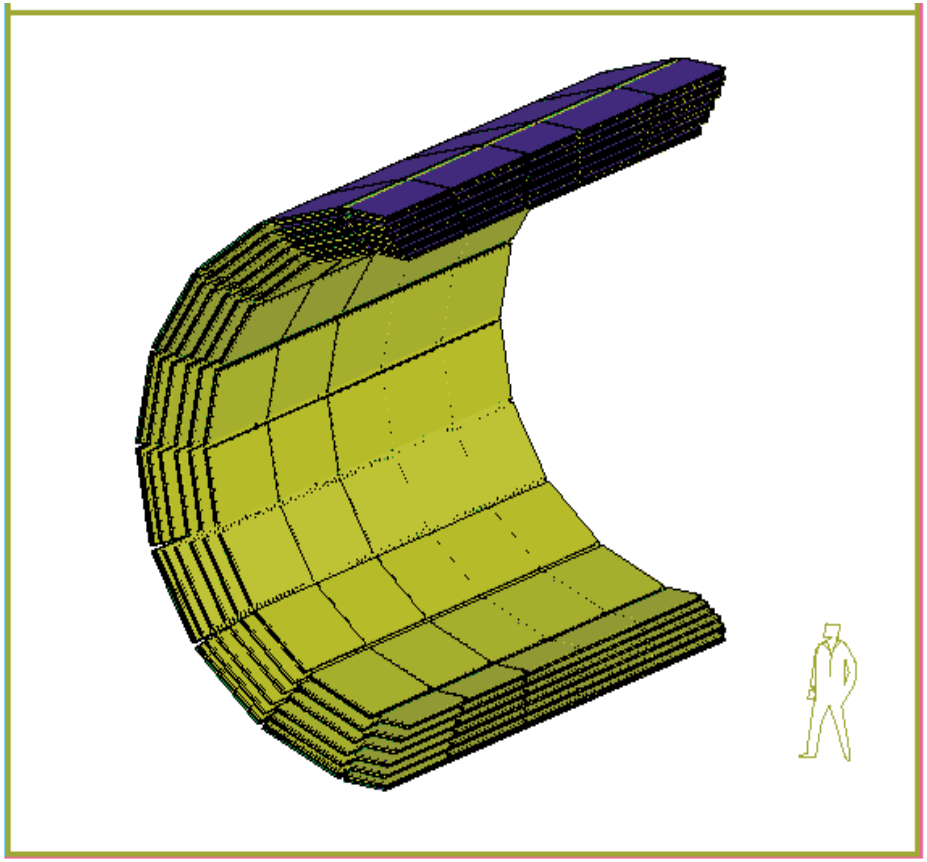

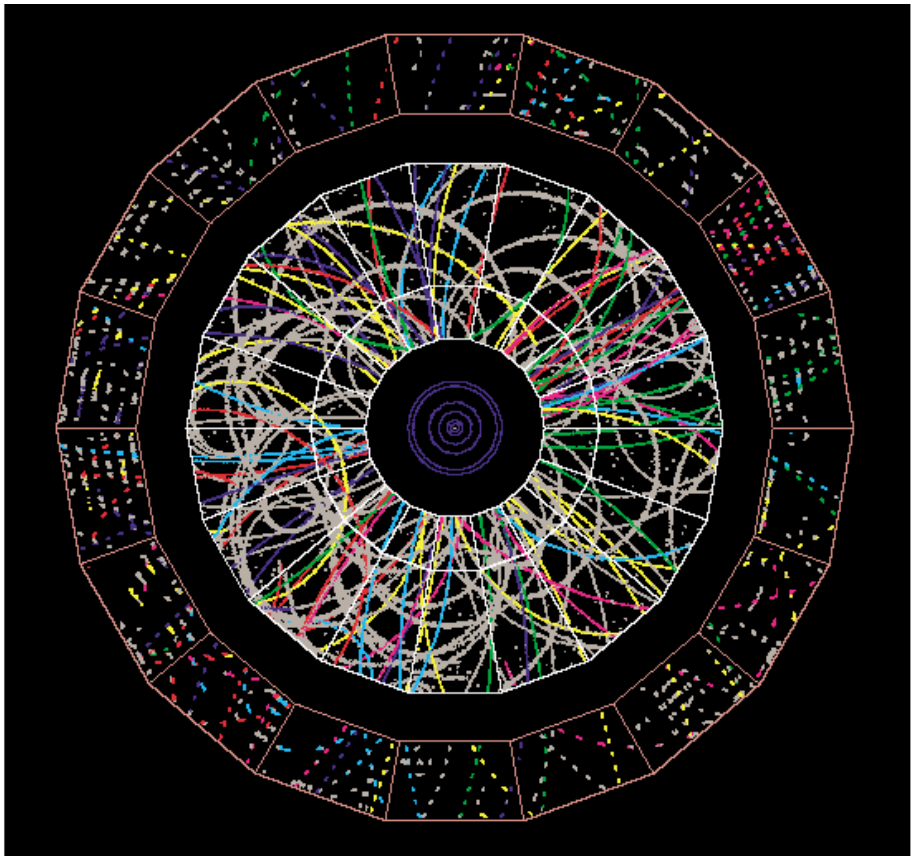

Carbon-polypropylene fibers/TEC (Xe-CO_2) with pad read-out, e/π identification, tracking and triggering

$\varepsilon_{\pi} \sim 10^{-3}$ @ $\varepsilon_e \sim 90\%$

ALICE TRD Chamber

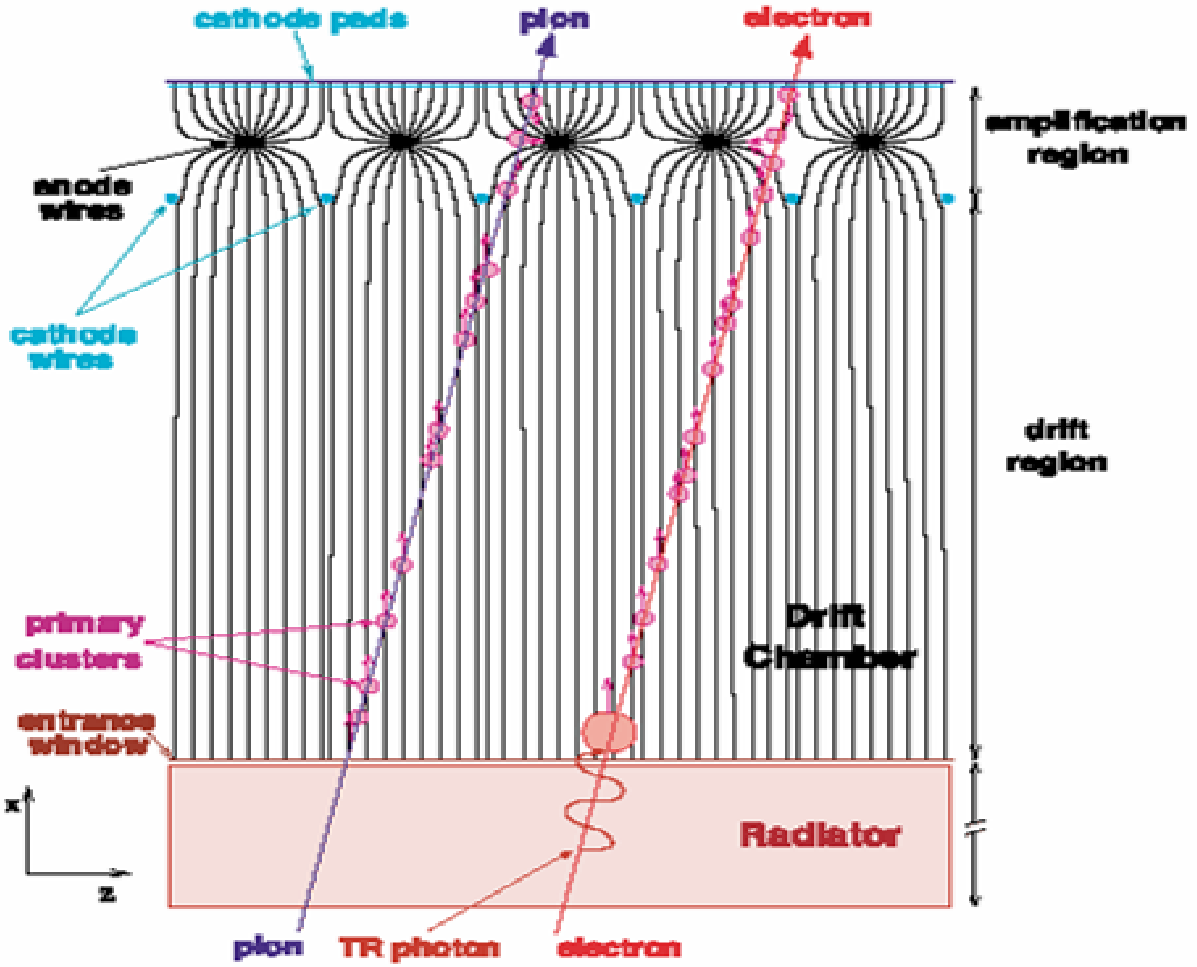

ALICE TRD performance

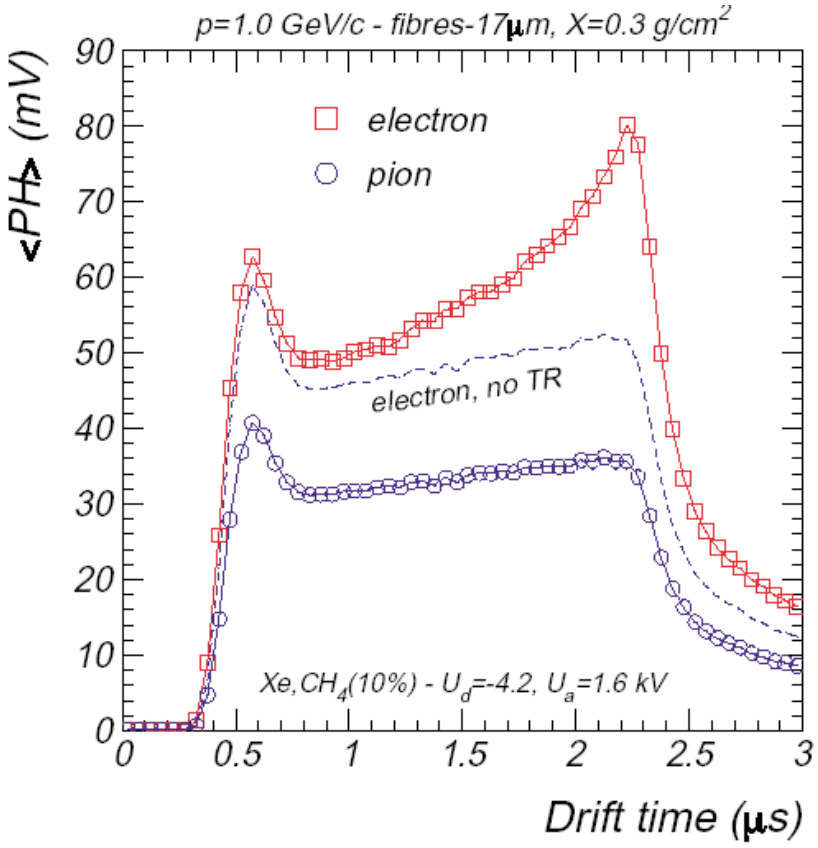

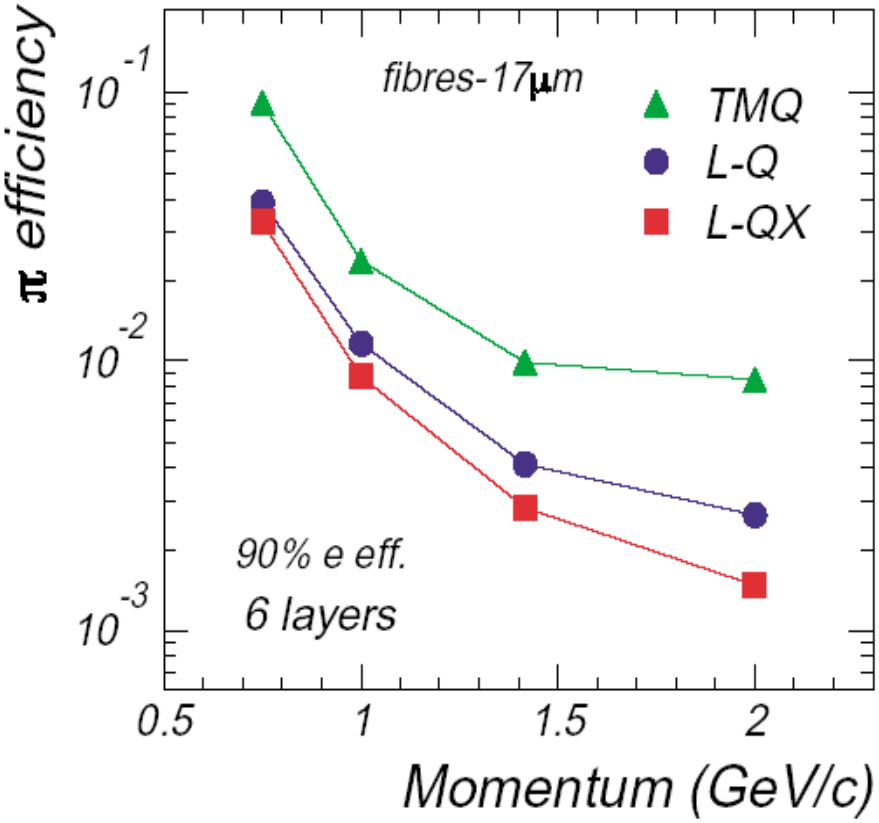

PHENIX Time Expansion Chamber TRD

- 24 chambers arranged in 4, 6-chamber sectors, each 3.7m × 2.0m × 0.1m containing 2700 wires
- polypropylene fibers/TEC (Xe-C_4H_{10}), e/π identification, tracking and momentum reconstruction using dE/dx

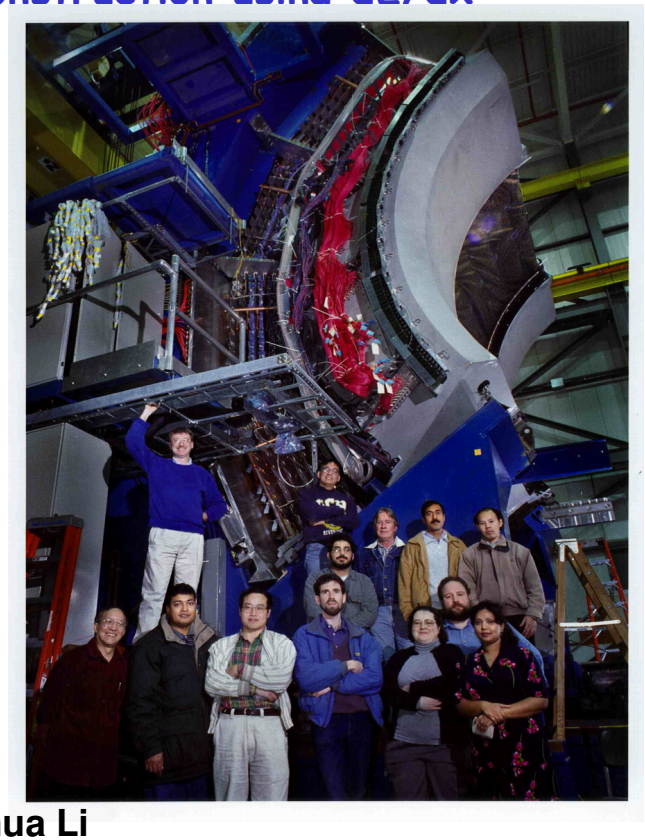

Xinhua Li
Univ. of California, Riverside, CA 92521, USA

TRDs for Cosmic Rays

- CRN (1985): polyolefin fibers/MWPC (Xe-He-CO_2), primary cosmic ray energy measurement (Space Shuttle)
- WIZARD-TS93 (1993): C-fibres/MWPC (Xe-CO_2), e/hadron identification (balloon flight), $\varepsilon_\pi \sim 10^{-3}$ @ $\varepsilon_e \sim 90\%$
- HEAT (1994): fibers/MWPC (Xe-CO_2), e/hadron identification (balloon flight), $\varepsilon_\pi \sim 10^{-3}$ @ $\varepsilon_e \sim 90\%$
- MACRO (1994-2000): CH_2 foam/square proportional tubes (Ar-CO_2), underground μ–energy measurement (LNGS)
- PAMELA (2004): C-fibers/straw tubes (Xe-CO_2), e/hadron identification (satellite mission), $\varepsilon_\pi \sim 10^{-2}$ @ $\varepsilon_e \sim 90\%$
- AMS2 (2006): Fiber/straw tubes (Xe-CO_2), e/hadron identification (Space Station) $\varepsilon_\pi \sim 10^{-3}$-$10^{-2}$ @ $\varepsilon_e \sim 90\%$

Hadron Colliders beyond LHC

Two main routes past LHC:

increase luminosity	increase energy:
SLHC	VLHC
$L=10^{35}$ cm^{-2}s^{-1}	Phase I: $L=10^{34}$cm^{-2}s^{-1}, $\sqrt{s}$ = 40 TeV
$\sqrt{s}$ = 14 TeV	Phase II: $L=5\text{-}2\times10^{34}$cm^{-2}s^{-1}, $\sqrt{s}$ = 125-200 TeV

ELOISATRON: $L=10^{36}$cm^{-2}s^{-1}, $\sqrt{s}$ = 200-1000 TeV

Plans to reach far-energy frontier beyond the LHC require a significant, continued world-wide R&D effort, based on realistic studies of experimental conditions and ability to detect and reconstruct event characteristics in full. Fast particle (**leptons**) identification detectors (TRDs?) are needed !

Some R&Ds for fast TRDs: TRDs to tag high energy hadron beam (as trigger or veto)

- E769 (1991)-E791: pions/kaons/protons beam at 250 GeV/c-500 GeV/c (2 MHz rate),
- 24 modules radiator (polypropylene foils)/double-gap MWPCs (Xe-CO_2),
- drift time ~ 120 ns (not yet so fast…),
- protons contamination of 2% @ 87% pions efficiency

Fast TRD to tag high energy hadron beam (as trigger or veto)

- TRD for SPS-beam proposed for NA57 experiment (1999)
- pions/kaons/protons beam ~ 200 GeV/c (4 MHz rate),
- 16 modules radiator (C-fibers)/double straw tubes layer (Xe-CO2),
- short drift time ~ 40 ns !
- protons (pions) contamination: 2-3 % @ 90% pions (protons) efficiency

Fast-TRD for a SPS-beam: detector view (P.Spinelli et al., 1999)

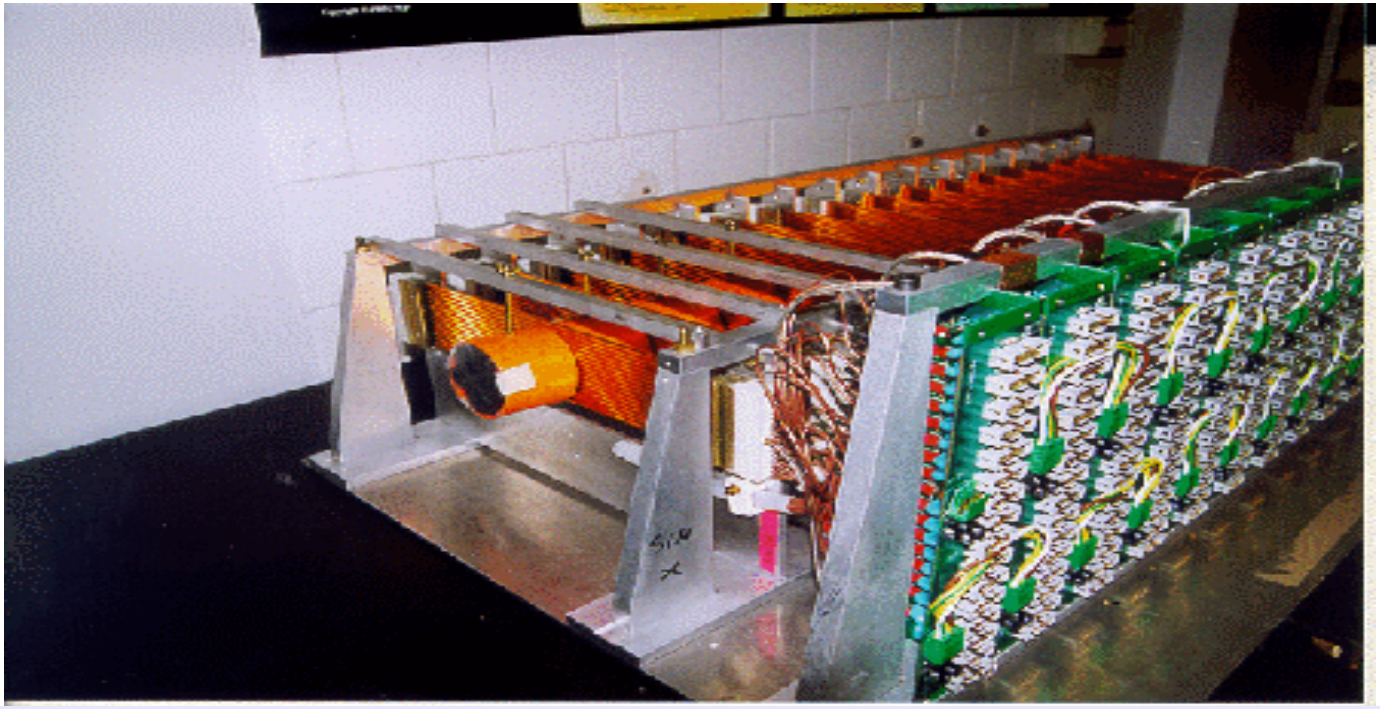

Radiator: 5 cm thick, made of short carbon fibers of 7 μm diameter
X-ray detector: kapton (30 μm thick) straw tubes, 4 mm diameter
Gas: Xe-CO_2 (70%-30%) @ 1 bar pressure

Fast-TRD for a SPS-beam: trigger layout

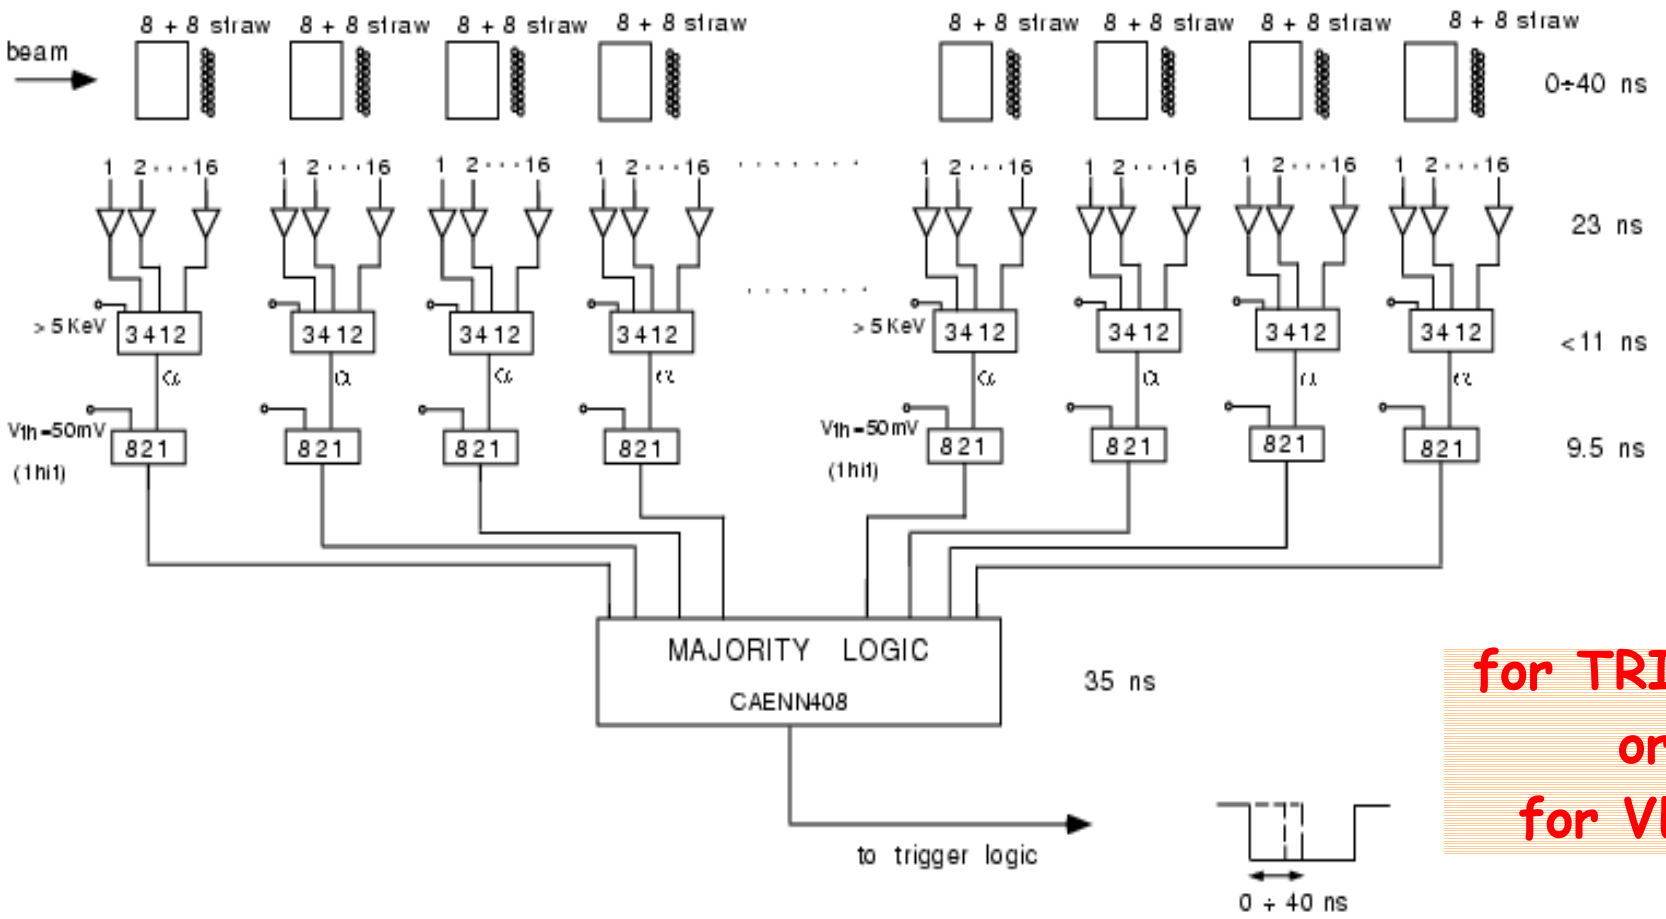

for TRIGGER
or
for VETO

Fast-TRD: e/π beam

Min.n° modules as **trigger**

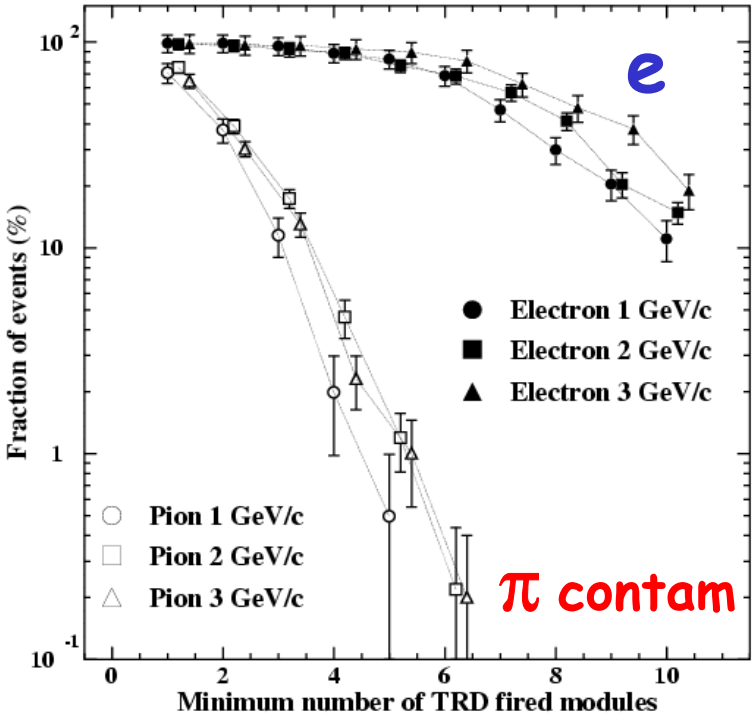

Min.n° modules as **veto**

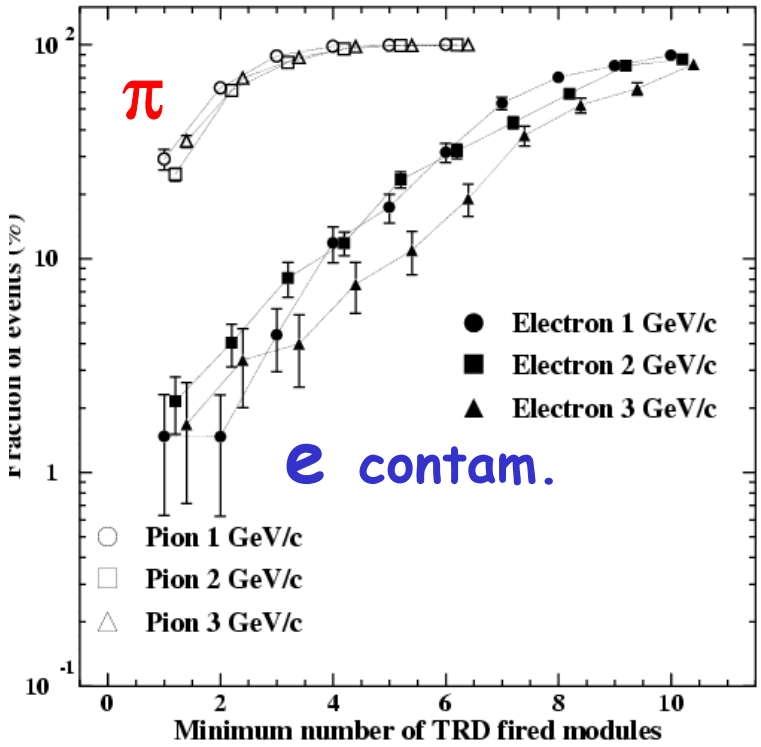

e/π ~ GeV/c ⇨ π/p ~ 100 GeV/c up to 1 TeV/c

Limitations of TRD electron/hadron rejection power

- Hadron interactions (mainly in the radiator material) →short TRDs !
- Energetic δ-electrons on the hadron track→gaseous chambers indicated…
- dE/dx relativistic rise for hadrons in gaseous detectors @ a few 100 GeV/c

Novel applications:TRD based on thin films of heavy inorganic scintillators

V.Sosnovtev et al,TRD 2003 Workshop, Bari

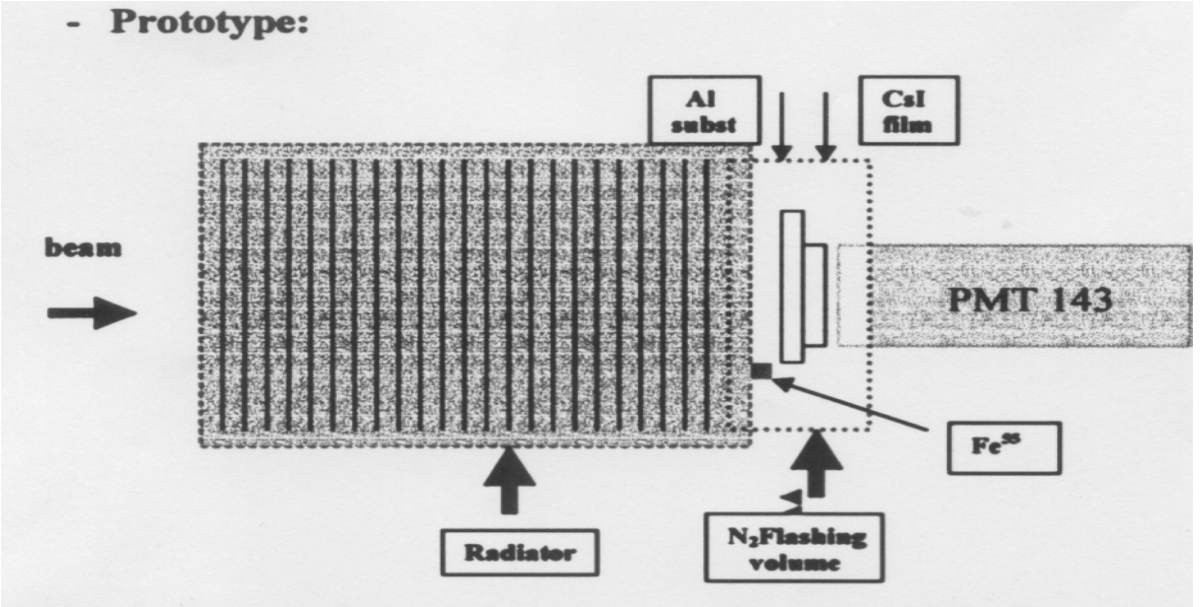

CsI 37μ thickness, decay time = 630 ns

next R&D: Lu_2S_3:Ce, decay time =32ns! (very fast…)

PM → Silicon *multi-microcounter* PM (Dolgoshein talk)

Landau and TR energy distributions

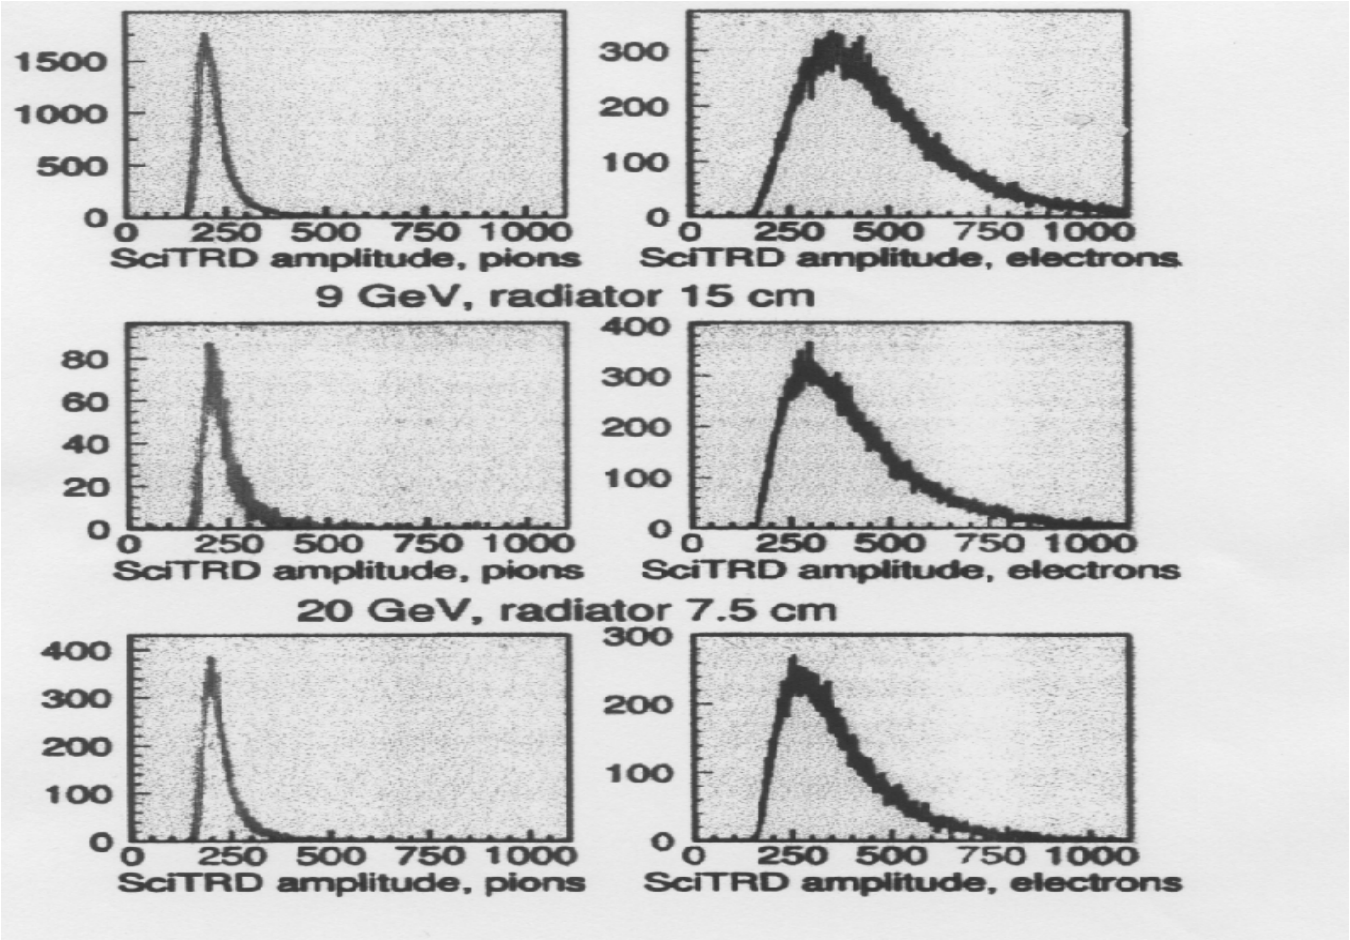

Rejection power

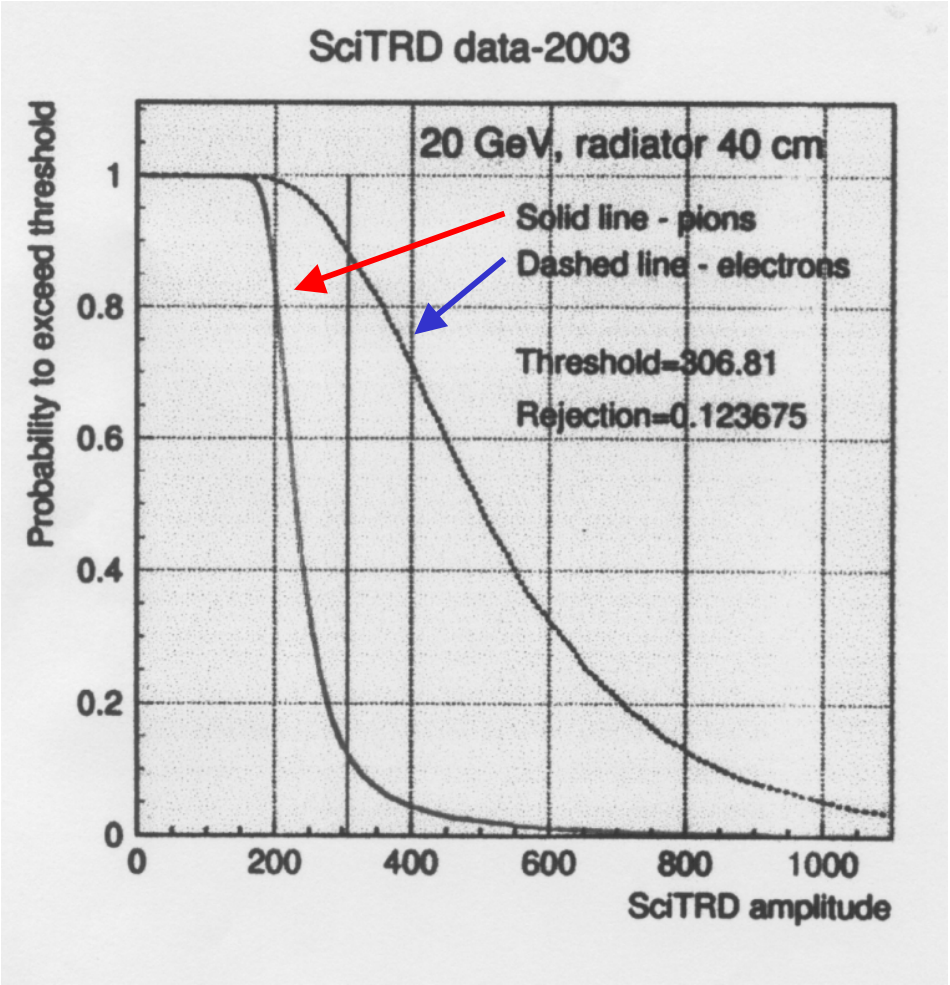

Novel applications : Silicon Strip TRD
(P.Spinelli et al., TRD 2003 workshop,Bari)

Silicon microstrip detectors track the radiating particle in a magnetic field and detect the TR X rays apart from the particle

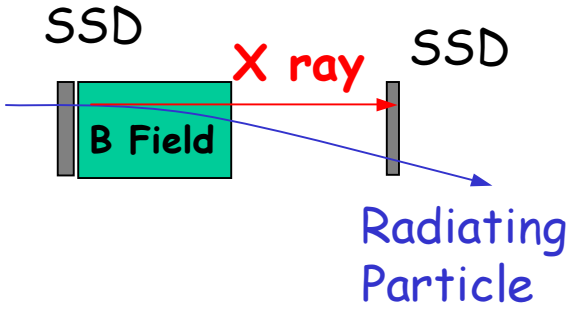

$$\frac{dE}{dx}_{Si} \approx 100keV \quad \longleftrightarrow \quad E_{TR} \approx 10keV$$

Typical 300-400μm thickness

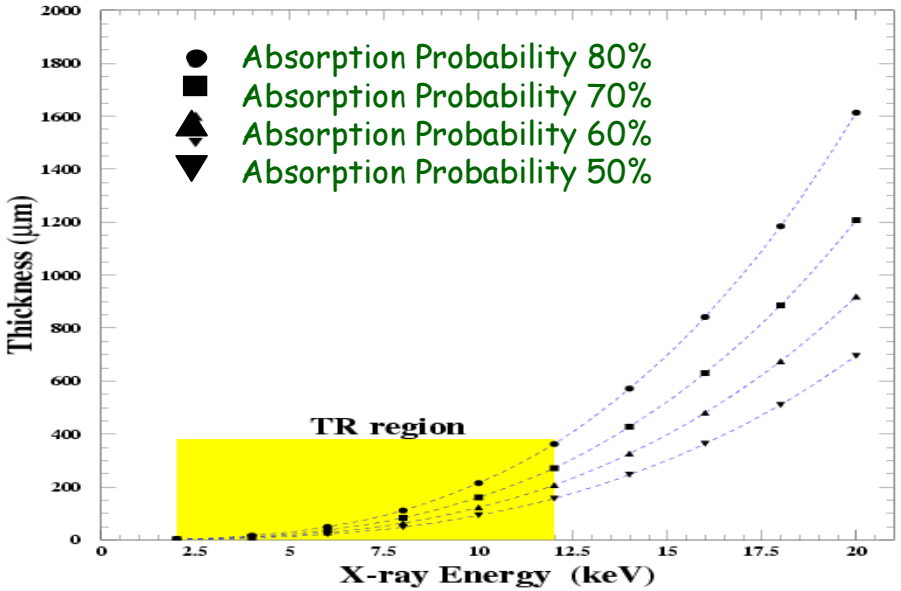

B Field ~ 1T

Beam Test 2003: The set-up

Beam: electrons & pions

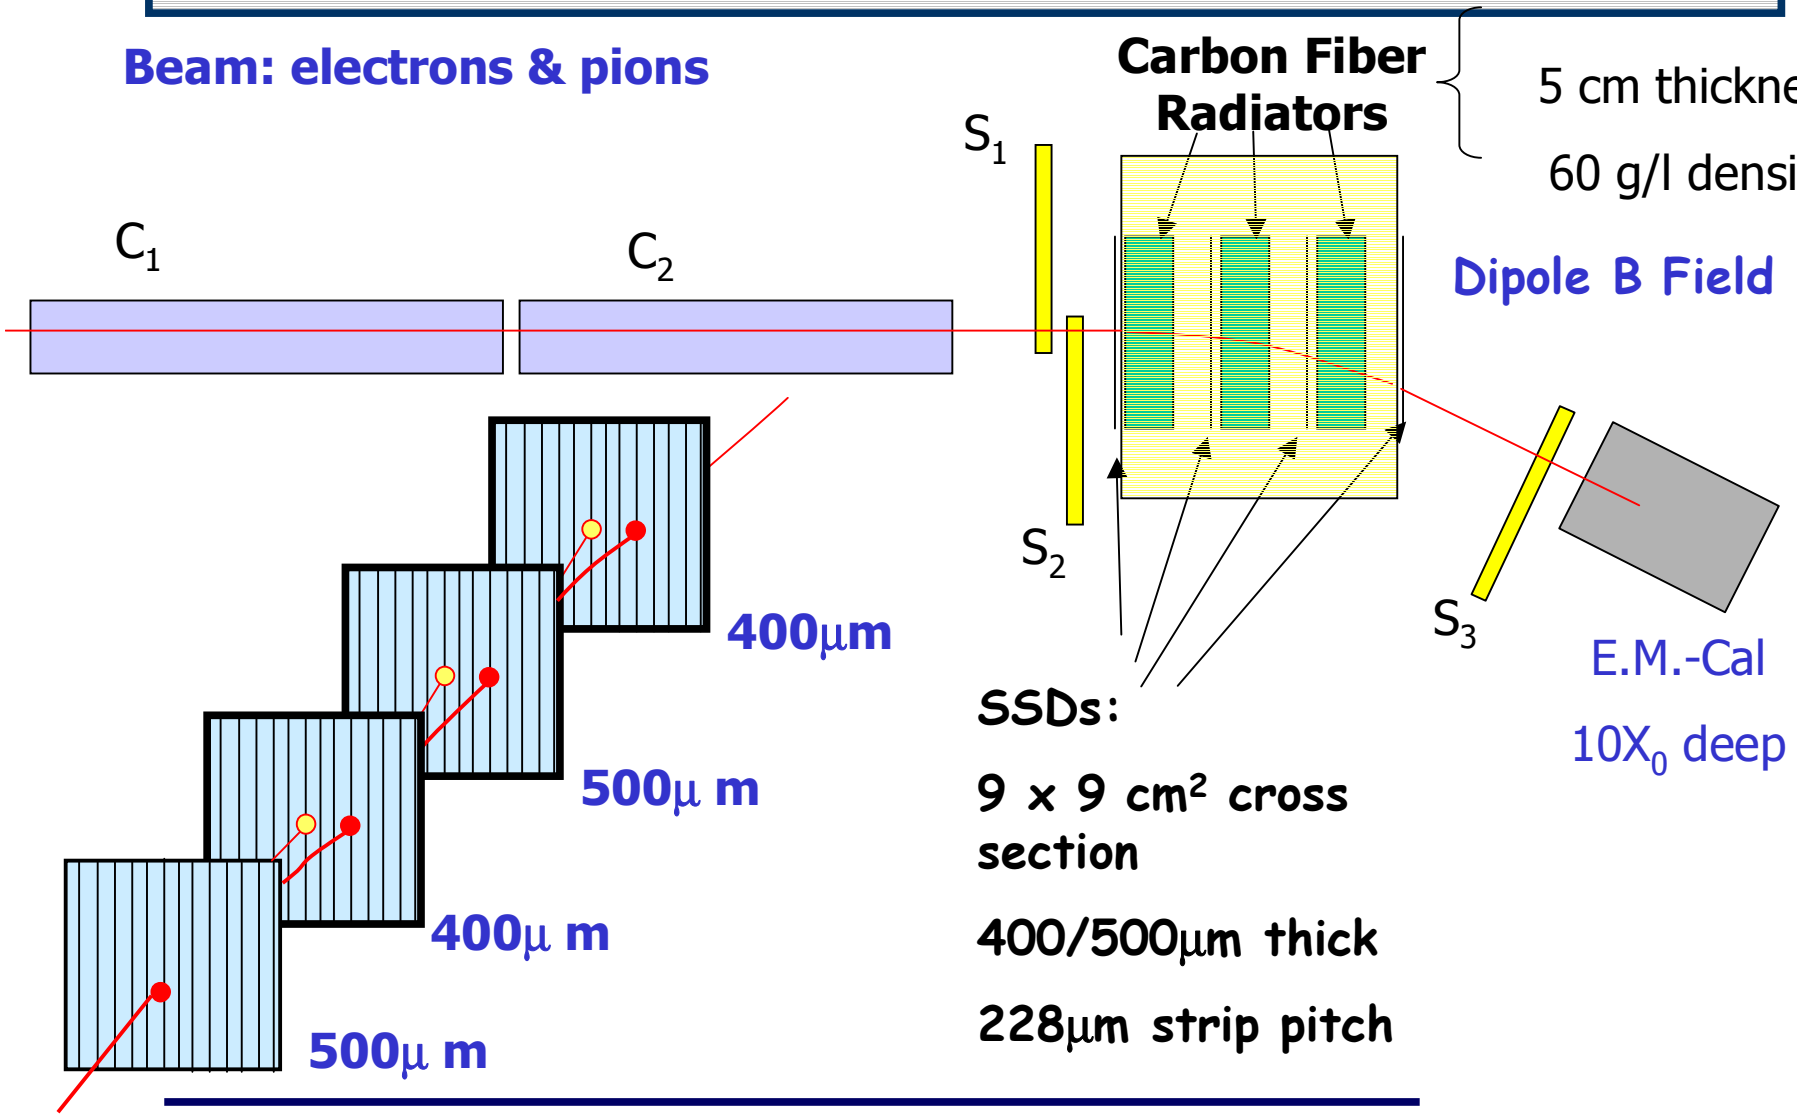

SSD Calibration

The ADC channel distribution is fitted with a Landau distrib.: the most probable value has been set to 111 keV for pions at 3GeV/c in 400 μm (Bichsel PDG 2002)

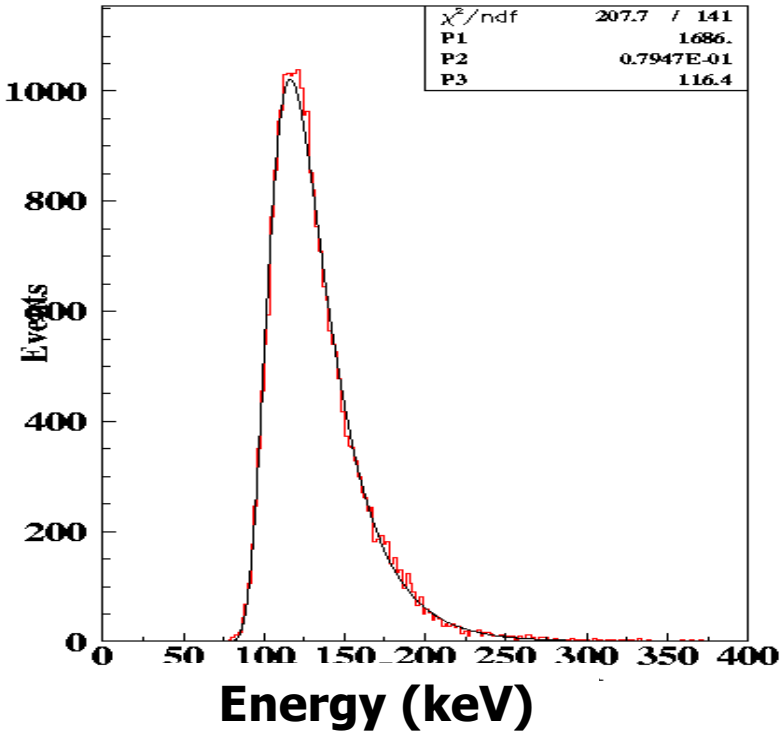

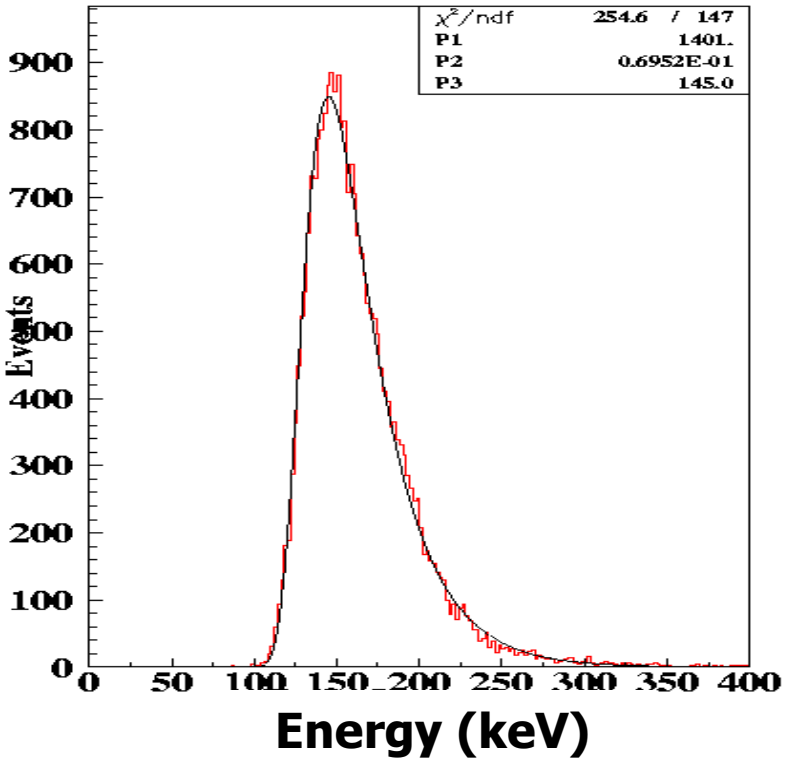

Electrons @ 3 GeV/c: 116 keV for 400 μm (Mod 1)

145 keV for 500 μm (Mod 2)

SSD Noise

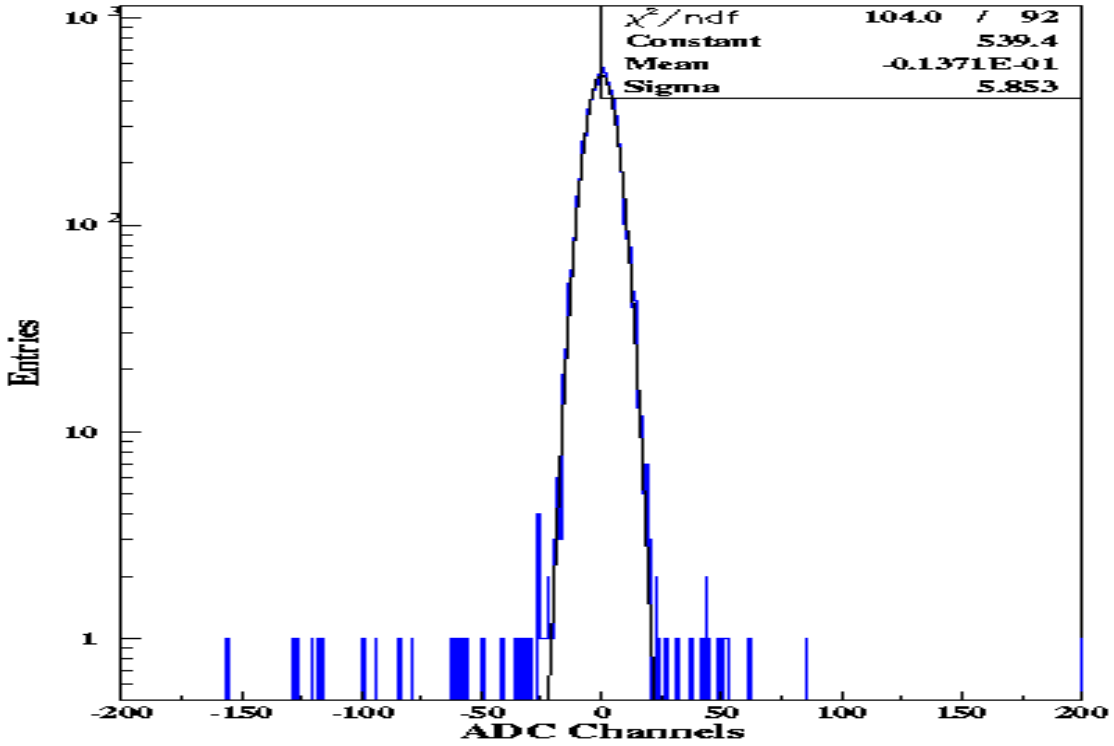

σ=5.8 chs ⇒ 1.3 keV

TR photons' search >3σ ~ 4 keV

The X-ray search algorithm

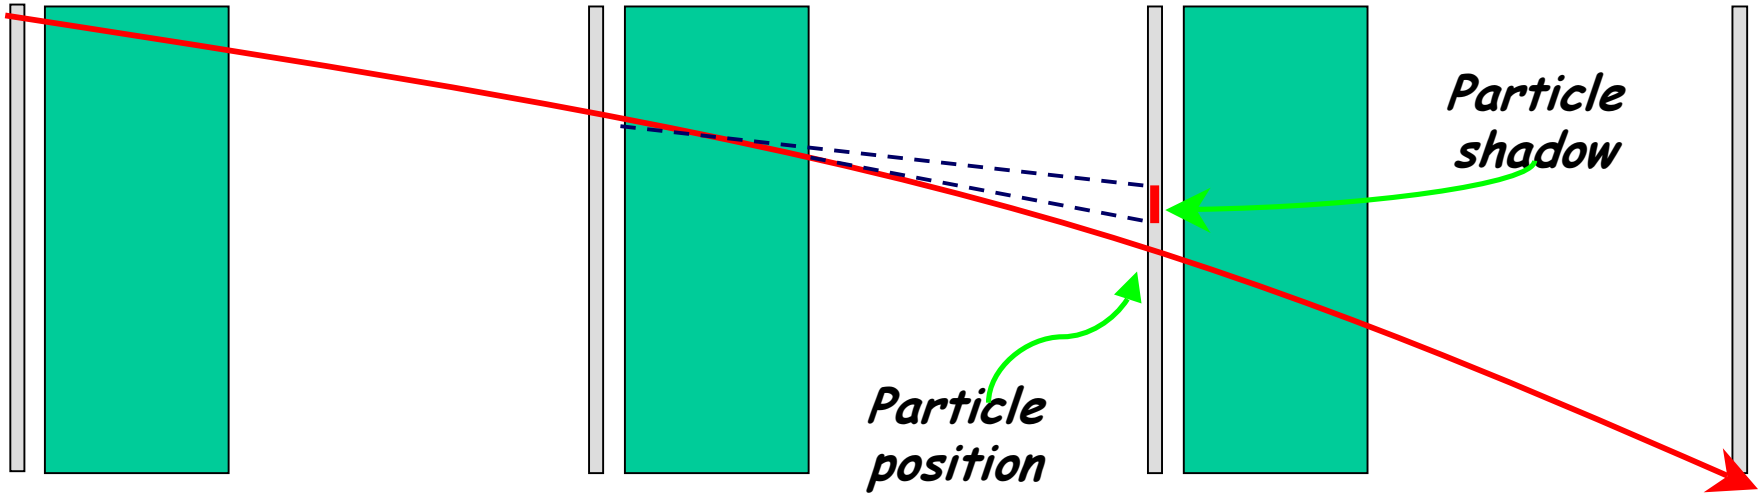

- ✓ The particle trajectory in the bending plane is approximated by an arc of a circle
- ✓ The tangents to the trajectory are drawn from the points at the beginning and at the end of each radiator
- ✓ TR X-ray search is performed in the region of the particle shadow
- ✓ X-ray clusters must have at least one strip with S/N > 3σ (4 keV); adjacent strips with S/N > 1σ are also included in the cluster

Energy Spectra

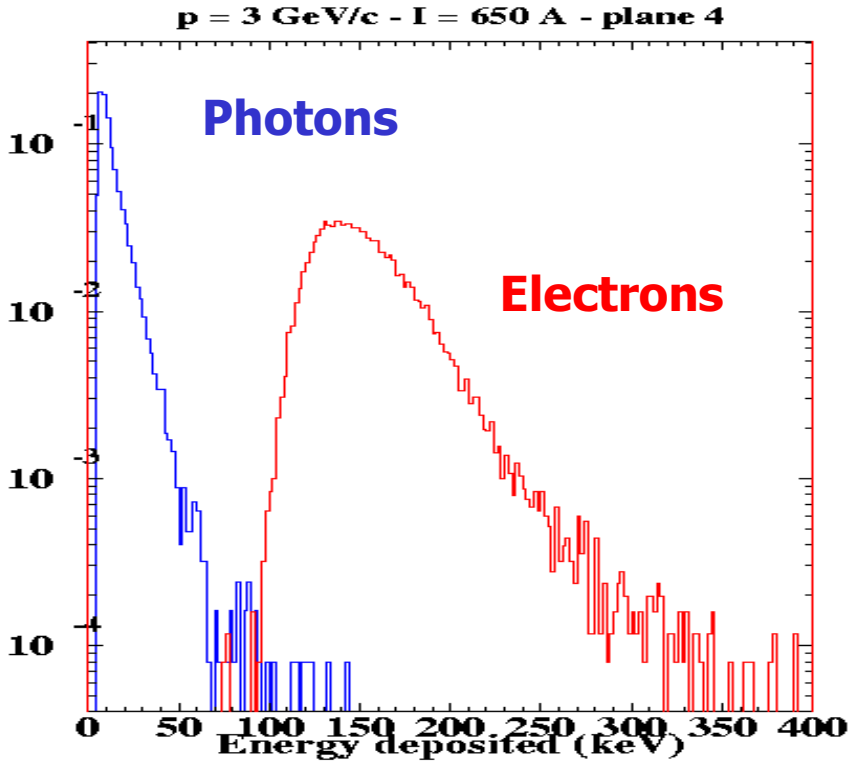

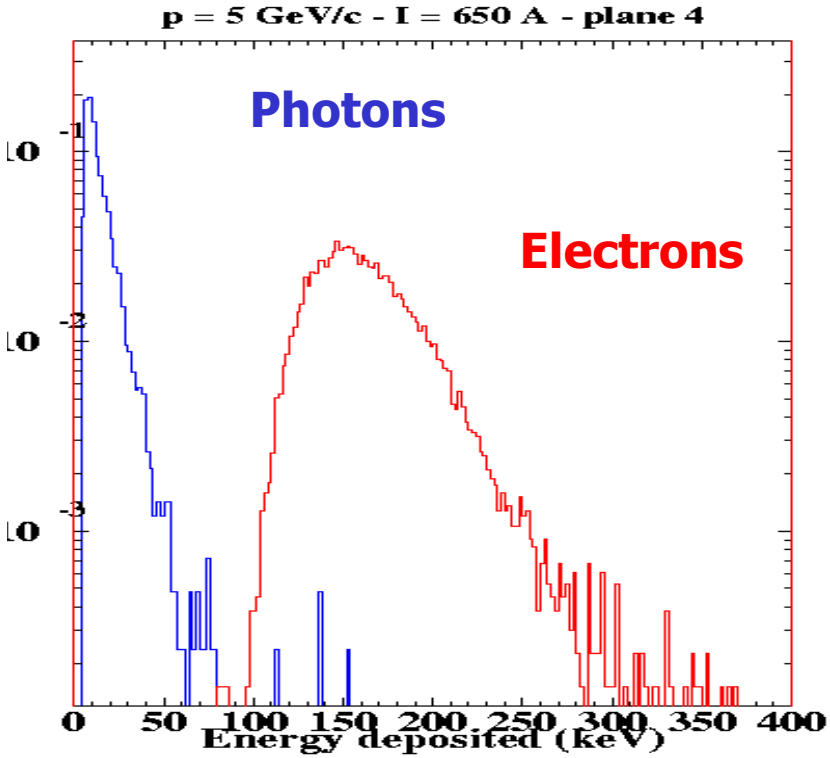

$\langle E_\gamma \rangle$ = 12.8 keV @ 3GeV/c

$\langle E_\gamma \rangle$ = 14.2 keV @ 5GeV/c

The two spectra are obtained in two separate SSD regions

Si-TRD test beam performance

Si-TRD electron tagging:

At least one TR photon (in the shadow region)

	3 GeV/c 1T	3 GeV/c 0.5T	5 GeV/c 1T	5 GeV/c 0.5T
e efficiency	80%	60%	55%	30%
π contamination	1.3%	1.3%	1.5%	1.5%
Rejection power	1.6%	2.1%	2.5%	4%

Time response ~ μs , depending on the electronics, (fair…)

But no gas is needed, and it can be used as spectrometer

Multi-layer SI-TRD

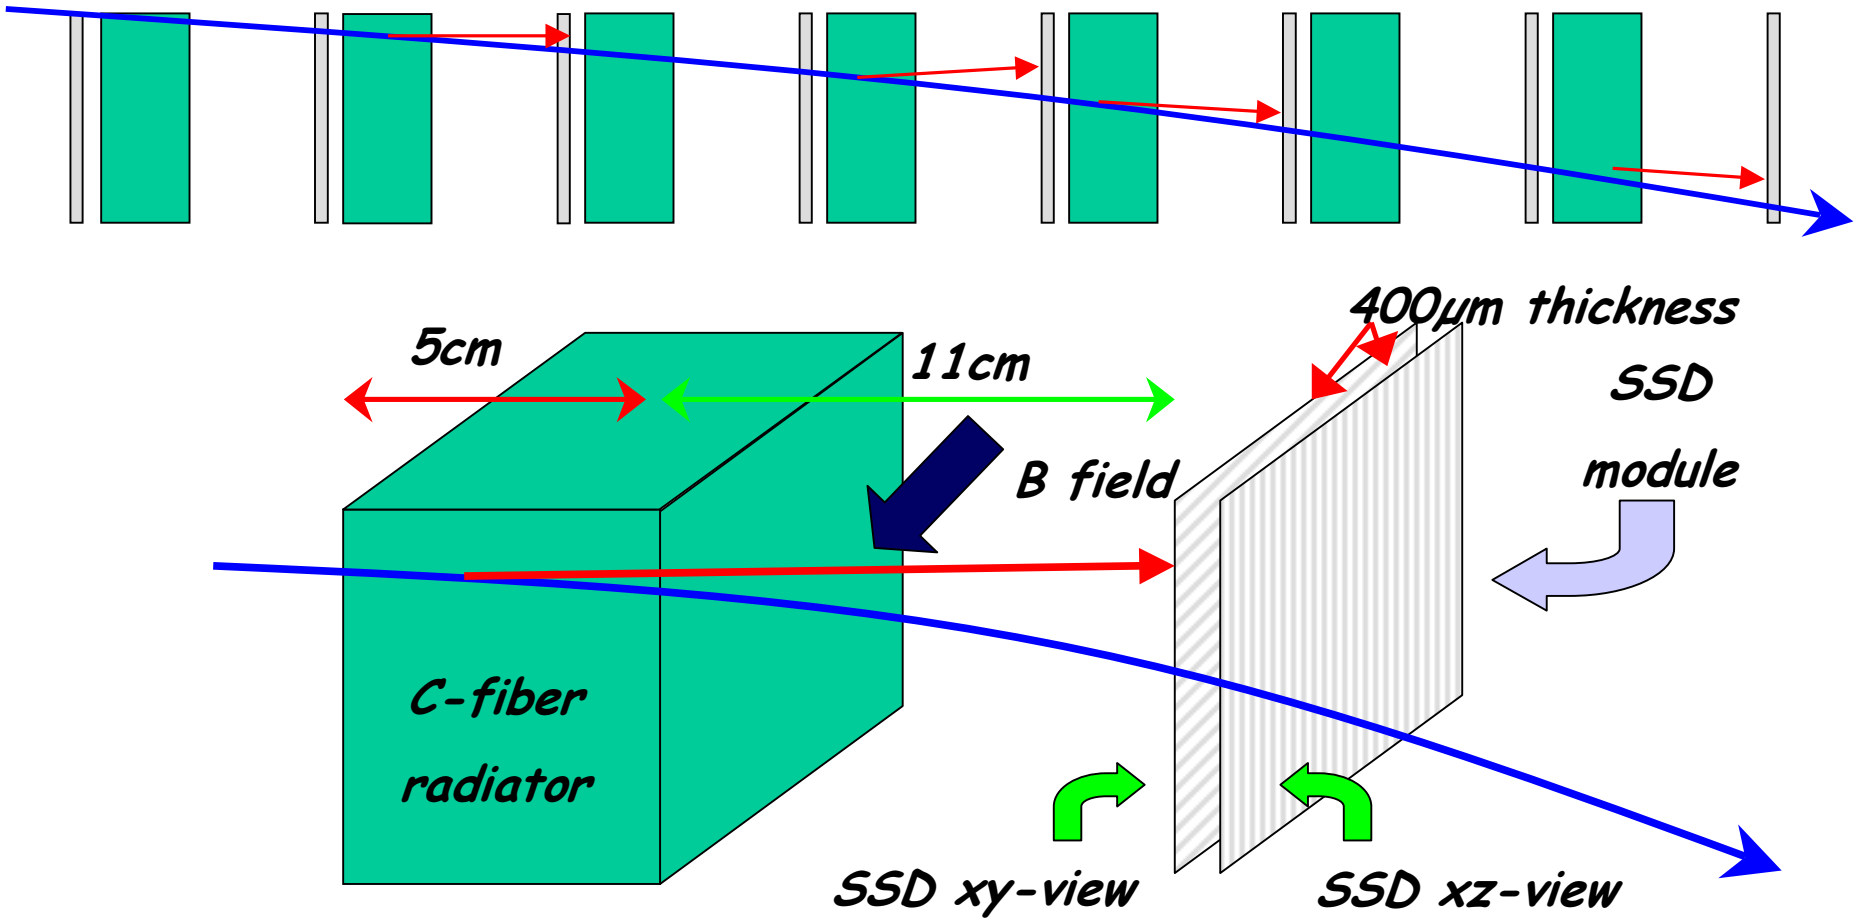

Multi-layer Si-TRD rejection

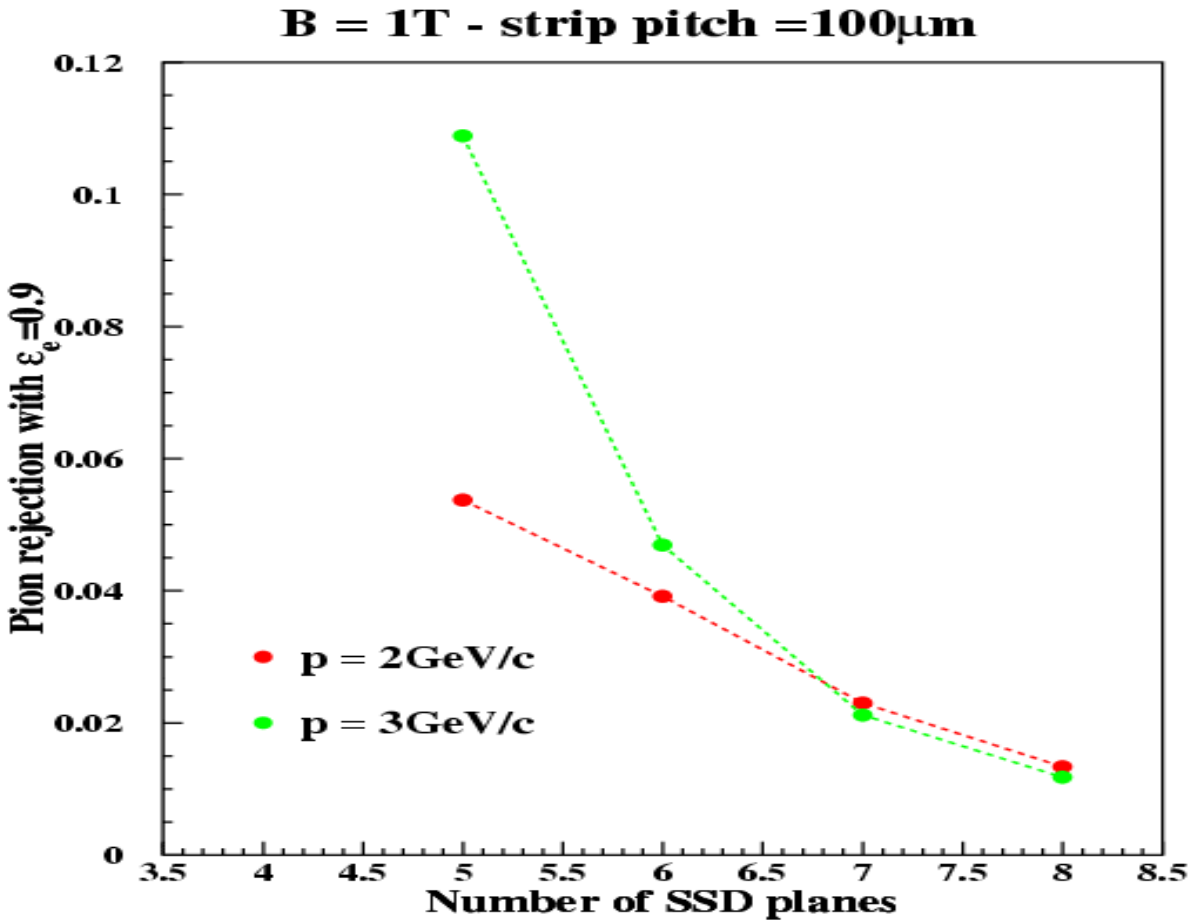

Next Future possible R&D for TRDs

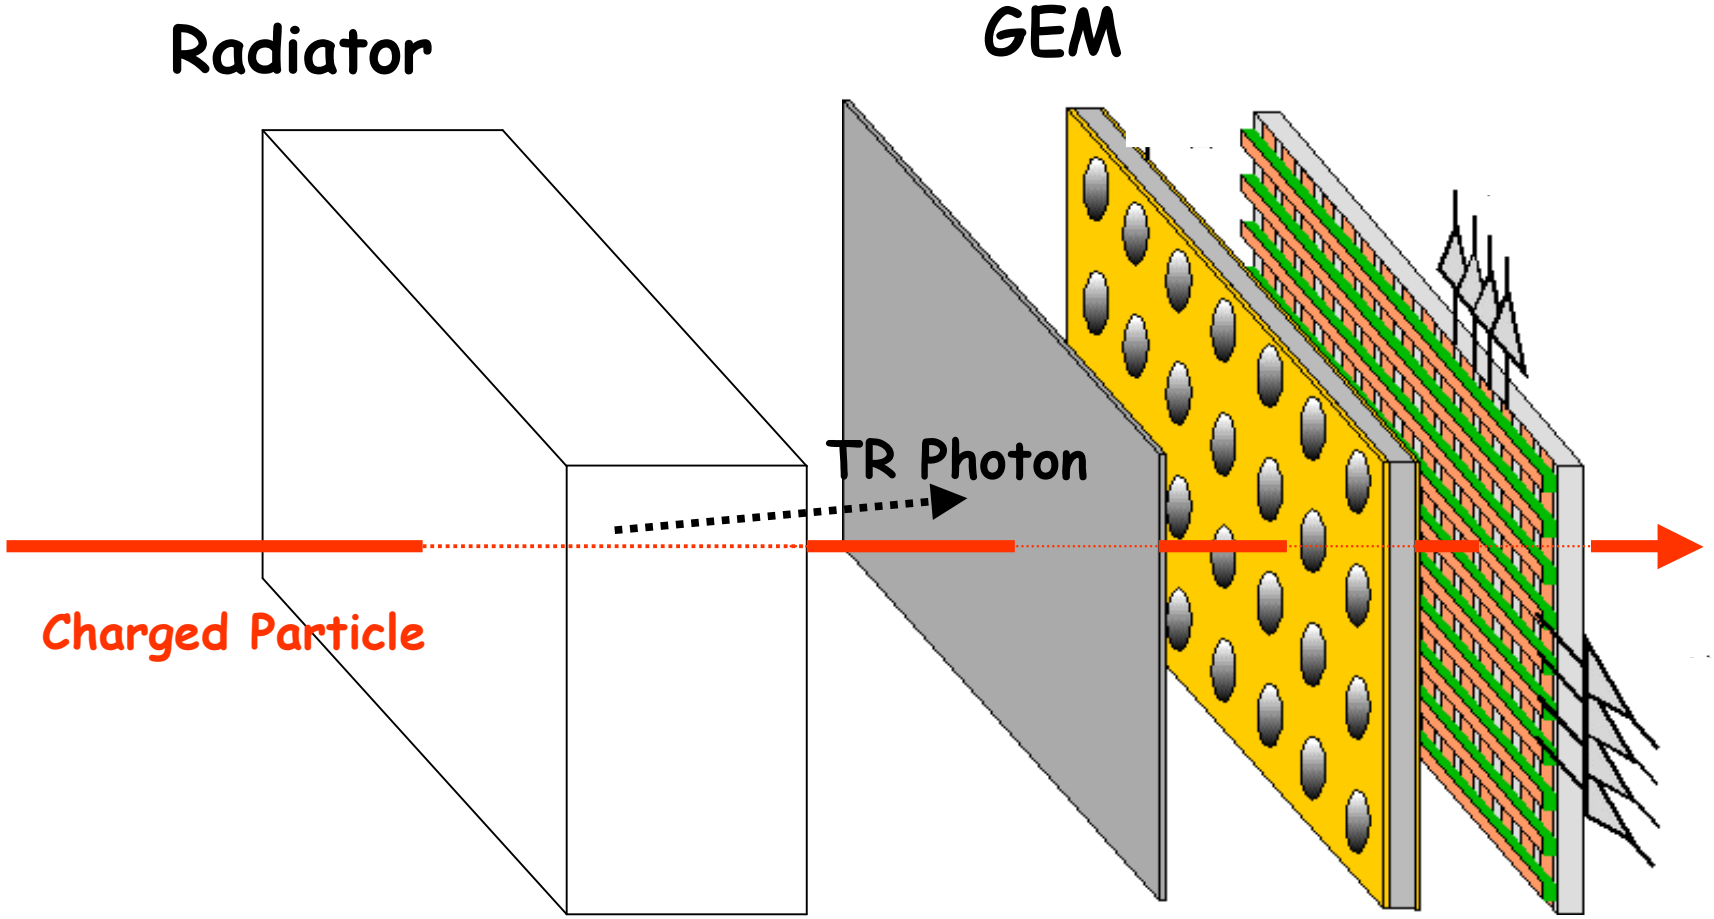

Signal time width ~ 10 ns ! (ultra fast!)

GEM (= Gas Electron Multiplier)

Thin metal-coated polymer foil chemically pierced by a high density of holes (technology developed at CERN)

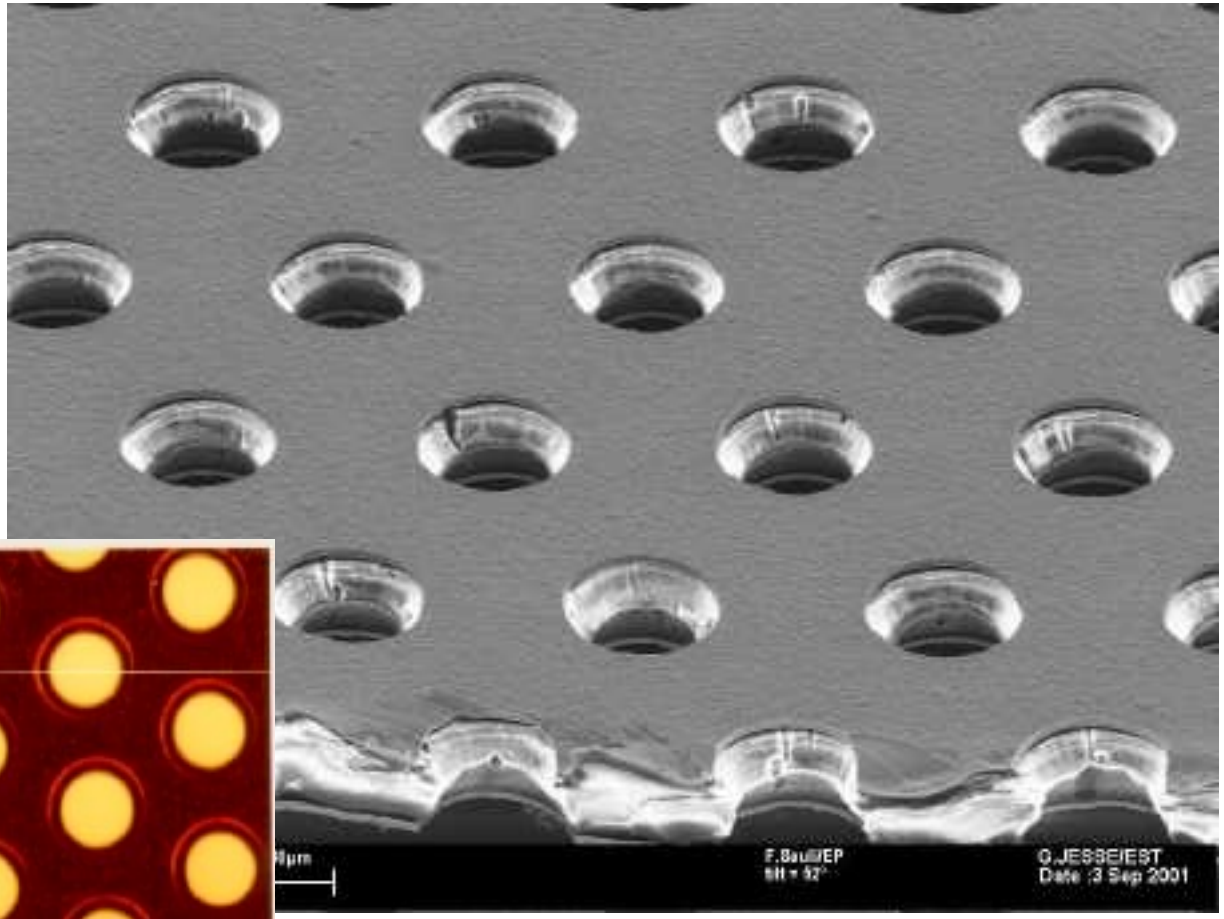

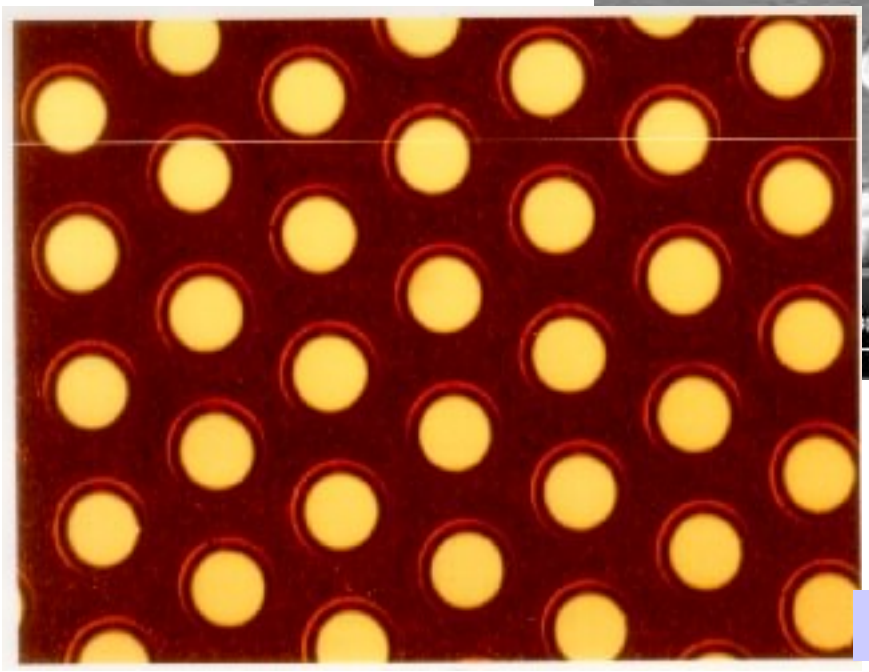

Typical geometry:
5 µm Cu on 50 µm Kapton
70 µm holes at 140 mm pitch

F. Sauli, Nucl. Instrum. Methods A386(1997)531

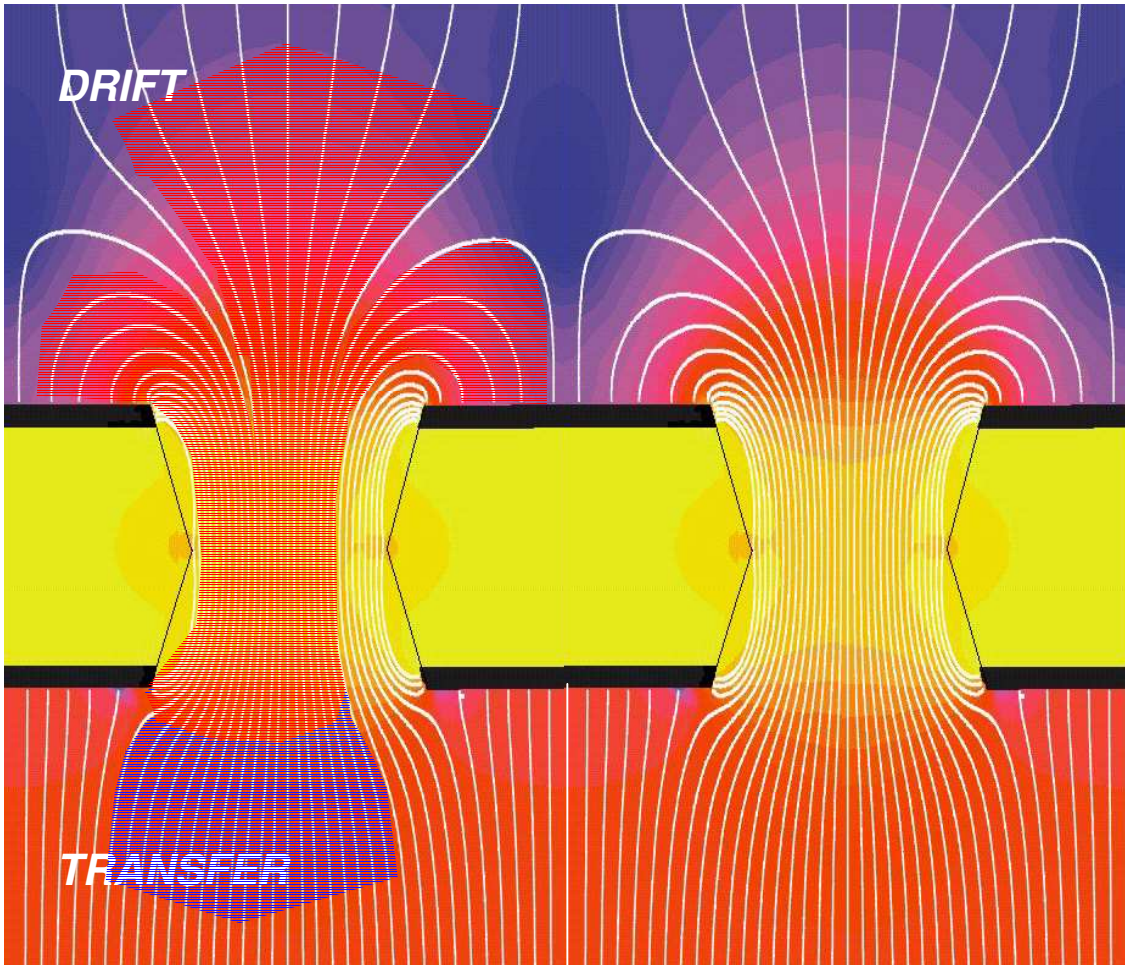
DRIFT
TRANSFER

GEM signal formation

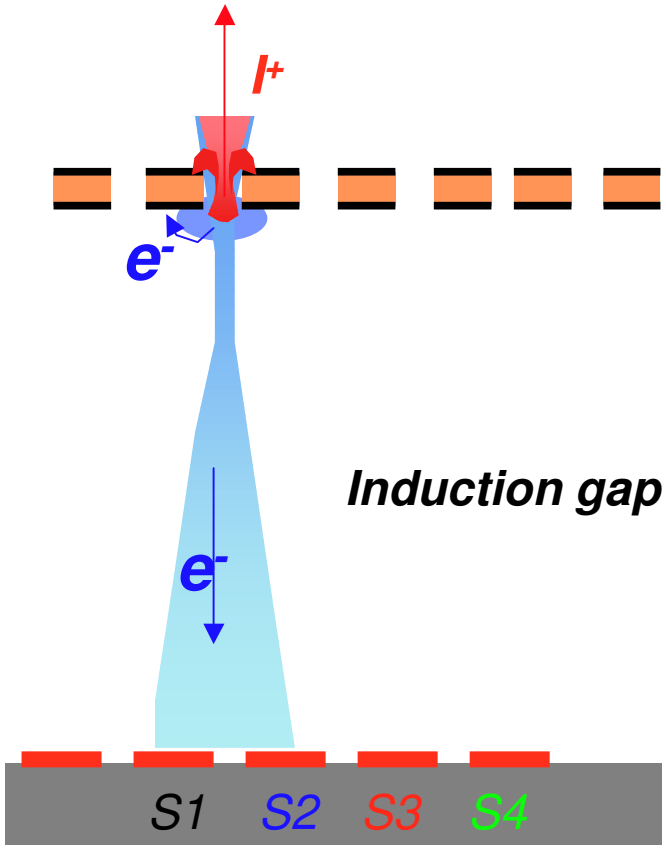

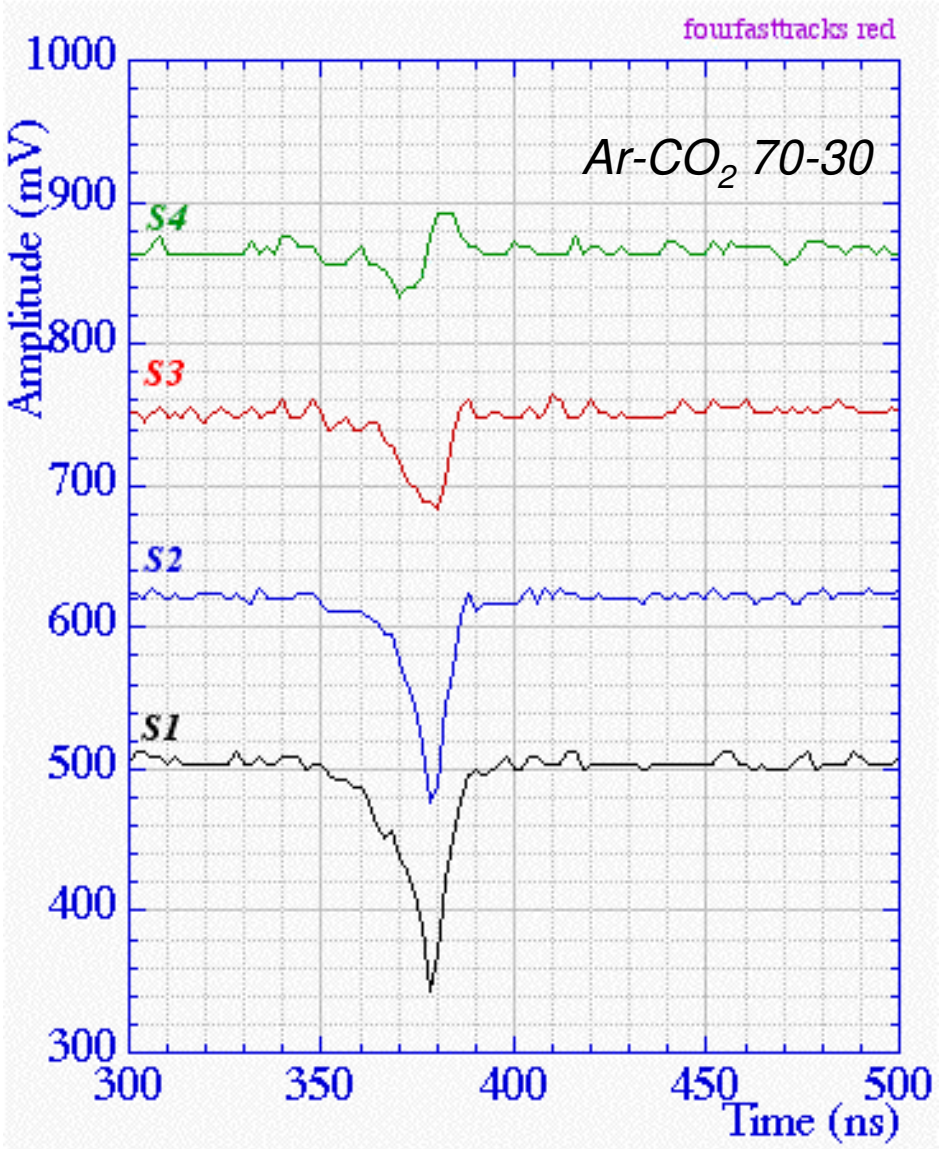

Fast electron signal only

No positive ion tail → very good multi-track time resolution

Conclusions

- TRDs are well suited for high energy particle (lepton) identification ($\rightarrow$TeV region)
- TRDs can also be used for the measurement of known mass particles
- TRDs can be used as first level trigger fast devices on high energy beam lines
- R&D results on novel TRDs are promising for PID for next generation of "super colliders"